

YELLOWSTONE RIVER WILDLIFE MANAGEMENT AREA
NOT TO SCALE

PLAN SHEET INDEX:

SHEET 1 :	COVER
SHEET 2 :	WEST FENCE
SHEET 3 :	FOUR WIRE FENCE DETAILS
SHEET 4 :	JACK LEG FENCE AND PEDESTRIAN PASS DETAILS

- PROJECT NOTES :
1. WEST BOUNDARY FENCE: SEE SHEET 2 OF THE PLAN SHEETS.
 2. NORTH BOUNDARY FENCE ALTERATIONS: REMOVE 3 STRANDS OF BARBED WIRE (3520 rods) FROM FENCE AND REPLACE WITH BARBLESS WIRE (2345 rods. SPACING AND CONFIGURATION SHALL CONFORM TO FOUR WIRE FENCE DETAILS. SEE SHEET 3 OF THE PLAN SHEETS.
 3. NORTH BOUNDARY FENCE - NEW: REMOVE EXISTING FENCE (319 rods) AND CONSTRUCT NEW FENCE (327 rods plus panel and gates) PER PLANS AND SPECIFICATIONS

J. Kevin McDonnell	3.2013				
DRAWN BY:	DATE:	REVISED BY:	DATE:	APPROVED BY:	DATE:
CHECKED BY:	DATE:	APPROVED BY:	DATE:	APPROVED BY:	DATE:




Montana Fish,
Wildlife & Parks

Yellowstone River Wildlife Management Area
Pompey's Pillar, MT



YELLOWSTONE RIVER WILDLIFE MANAGEMENT AREA WEST BOUNDARY ACCESS MAP
NOT TO SCALE

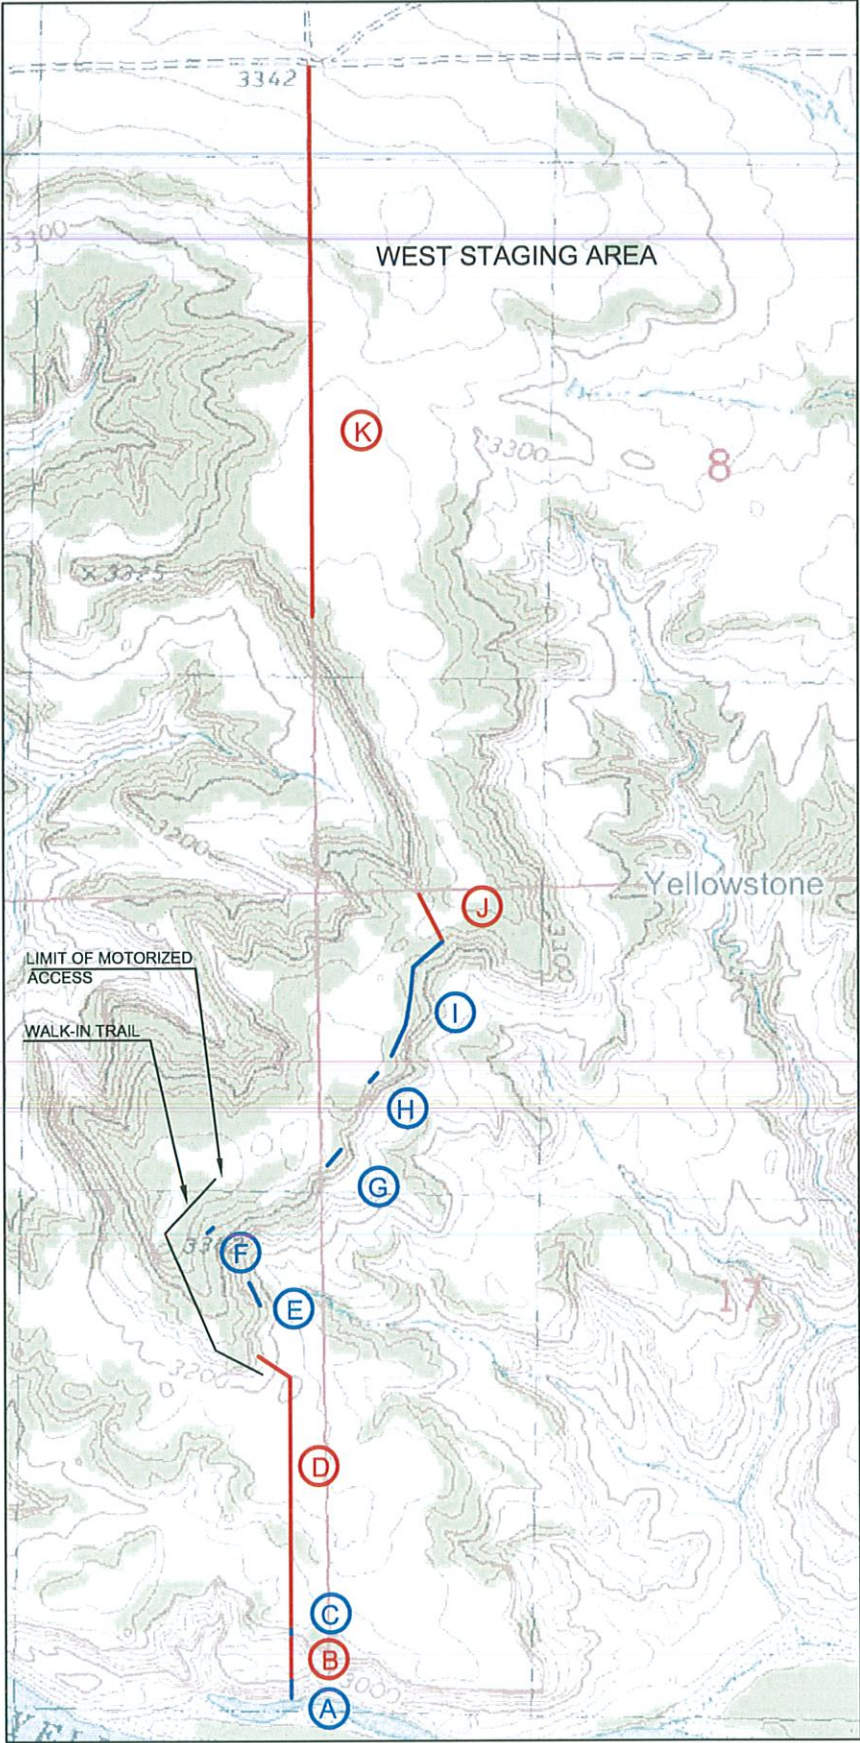

WEST BOUNDARY FENCE :

1. ALL MATERIALS FOR THE WEST BOUNDARY PORTION OF THE PROJECT WILL BE PROVIDED THROUGH THE OWNER, AND PLACED AT THE WEST STAGING AREA. (EXCEPTION: MATERIALS FOR PEDESTRIAN PASSES TO BE PROVIDED BY CONTRACTOR)
2. MATERIALS TO BE USED IN INACCESSIBLE AREAS (SECTIONS A-D) WILL BE AIRLIFTED BY FWP TO LOCATIONS NEAR THE PROJECT. THE CONTRACTOR SHALL DETERMINE THE QUANTITIES AND LOCATIONS THROUGH THE FWP ENGINEER.
3. FENCE LOCATIONS WILL BE STAKED IN THE FIELD.
4. MOTORIZED ACCESS WILL BE ALLOWED TO A POINT WITHIN .6 MILES OF THE SOUTHERN-MOST POINT OF THE WEST BOUNDARY FENCE. SEE MAP.
5. EXISTING FENCE MATERIALS WILL BE REMOVED FROM SECTIONS A-D BY FWP. THE CONTRACTOR SHALL ROLL THE EXISTING WIRE INTO 3' - 4' ROLLS, AND STACK ROLLED WIRE AND STEEL POSTS AT 1/8 MILE INTERVALS NEAR THE EXISTING FENCE.
6. EXISTING FENCE MATERIALS REMOVED FROM SECTIONS E-K SHALL BECOME THE PROPERTY OF THE CONTRACTOR TO BE DISPOSED OF IN A SAFE AND LEGAL MANNER.
6. THE CONTRACTOR WILL BE REQUIRED TO STAY ON DESIGNATED ACCESS ROUTES, AND SUSPEND TRAVEL ON THOSE ROUTES IF THERE IS SUFFICIENT MOISTURE TO CAUSE RUTTING.

WEST BOUNDARY FENCE MAP:

THE JACK LEG FENCE LOCATIONS ARE SHOWN IN BLUE AND THE FOUR WIRE FENCE LOCATIONS ARE SHOWN IN RED. MAP LOCATIONS ARE APPROXIMATE.

- A. 300' JACK LEG FENCE
- B. 370' FOUR WIRE FENCE
 - INSTALL GATE
- C. 60' JACK LEG
- D. 1715' FOUR WIRE FENCE
 - REMOVE EXISTING FENCE
 - INSTALL GATE AT EXISTING GATE LOCATION
- E. 252' JACK LEG FENCE
- F. 72' JACK LEG FENCE
- G. 252' JACK LEG FENCE
- H. 48' JACK LEG FENCE
- I. 1056' JACK LEG FENCE
- J. 430' FOUR WIRE FENCE
 - REMOVE EXISTING FENCE
 - INSTALL GATE AT EXISTING GATE LOCATION
- K. 3550' FOUR WIRE FENCE
 - REMOVE EXISTING FENCE
 - INSTALL GATES AT EXISTING GATE LOCATIONS
 - REMOVE EXISTING 4' STEEL WALK-THROUGH GATE AND INSTALL IN NEW FENCE LINE
 - INSTALL (2) PEDESTRIAN PASSES AT DESIGNATED LOCATIONS (CONTRACTOR SHALL SUPPLY MATERIALS FOR PEDESTRIAN PASSES ONLY)




YELLOWSTONE RIVER WILDLIFE MANAGEMENT AREA WEST BOUNDARY FENCE MAP
NOT TO SCALE

J. Kevin McDonnell	3.2013				
DRAWN BY:	DATE:	REVISED BY:	DATE:	APPROVED BY:	DATE:
CHECKED BY:	DATE:	APPROVED BY:	DATE:	APPROVED BY:	DATE:





**Montana Fish,
Wildlife & Parks**

Yellowstone River Wildlife Management Area
Pompey's Pillar, MT

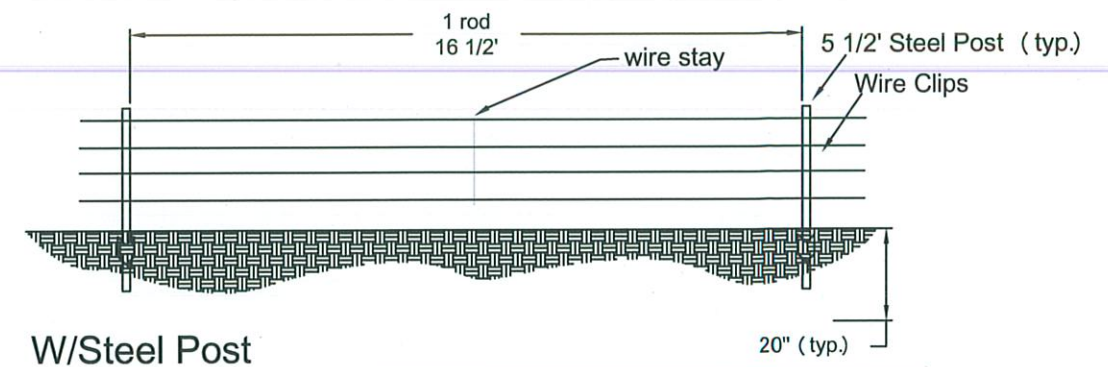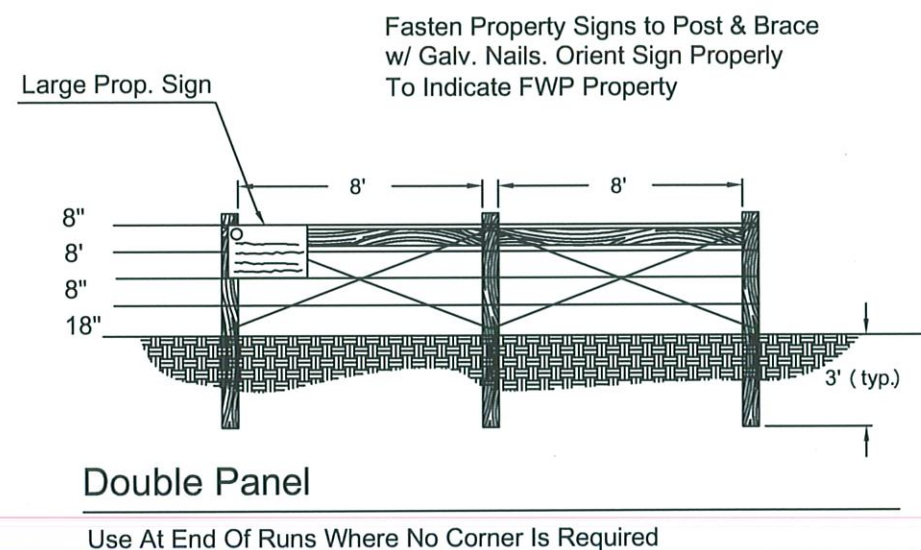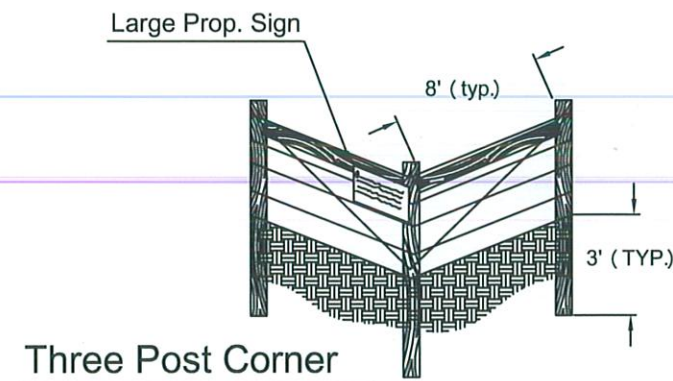

- * Top and bottom wire to be smooth
- * Install small property signs on fenceline (See specifications)

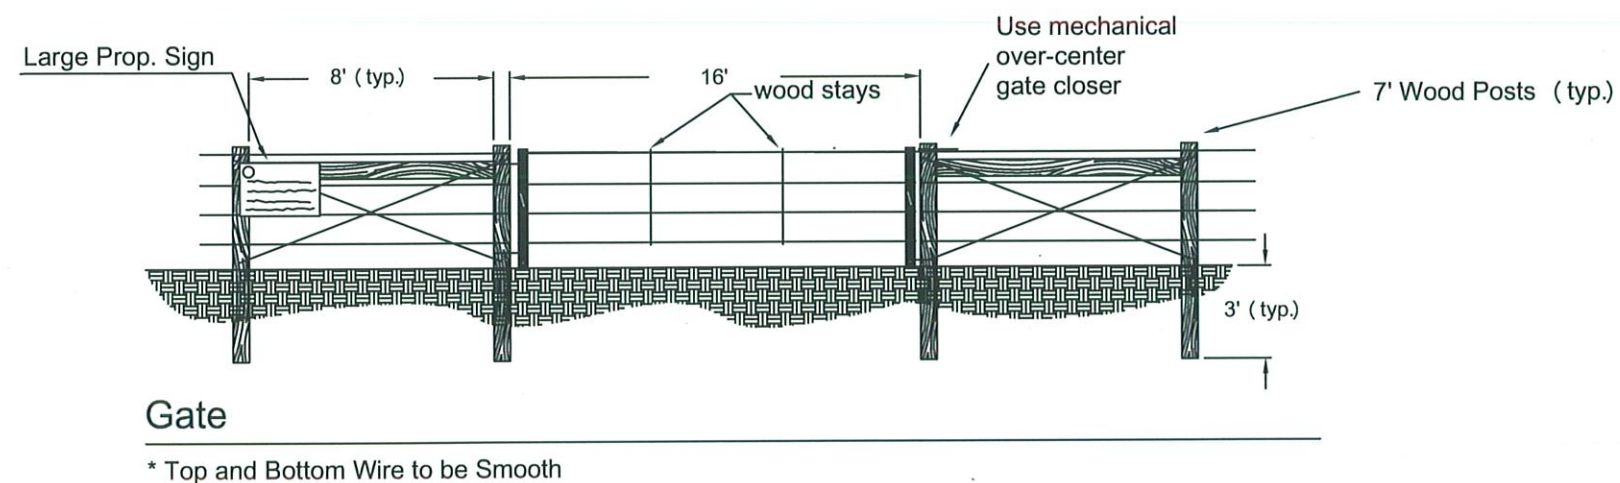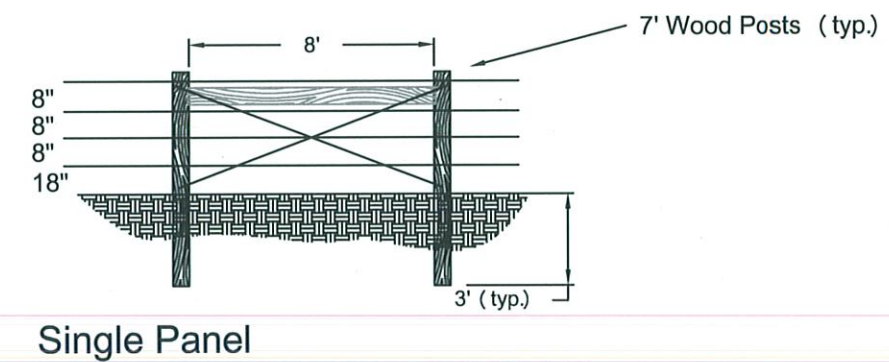

FOUR WIRE FENCE
NO SCALE



J. Kevin McDonnell	3.2013				
DRAWN BY:	DATE:	REVISED BY:	DATE:	APPROVED BY:	DATE:
CHECKED BY:	DATE:	APPROVED BY:	DATE:	APPROVED BY:	DATE:



**Montana Fish,
Wildlife & Parks**

Yellowstone River Wildlife Management Area
Pompey's Pillar, MT

SHEET: 3
of 4

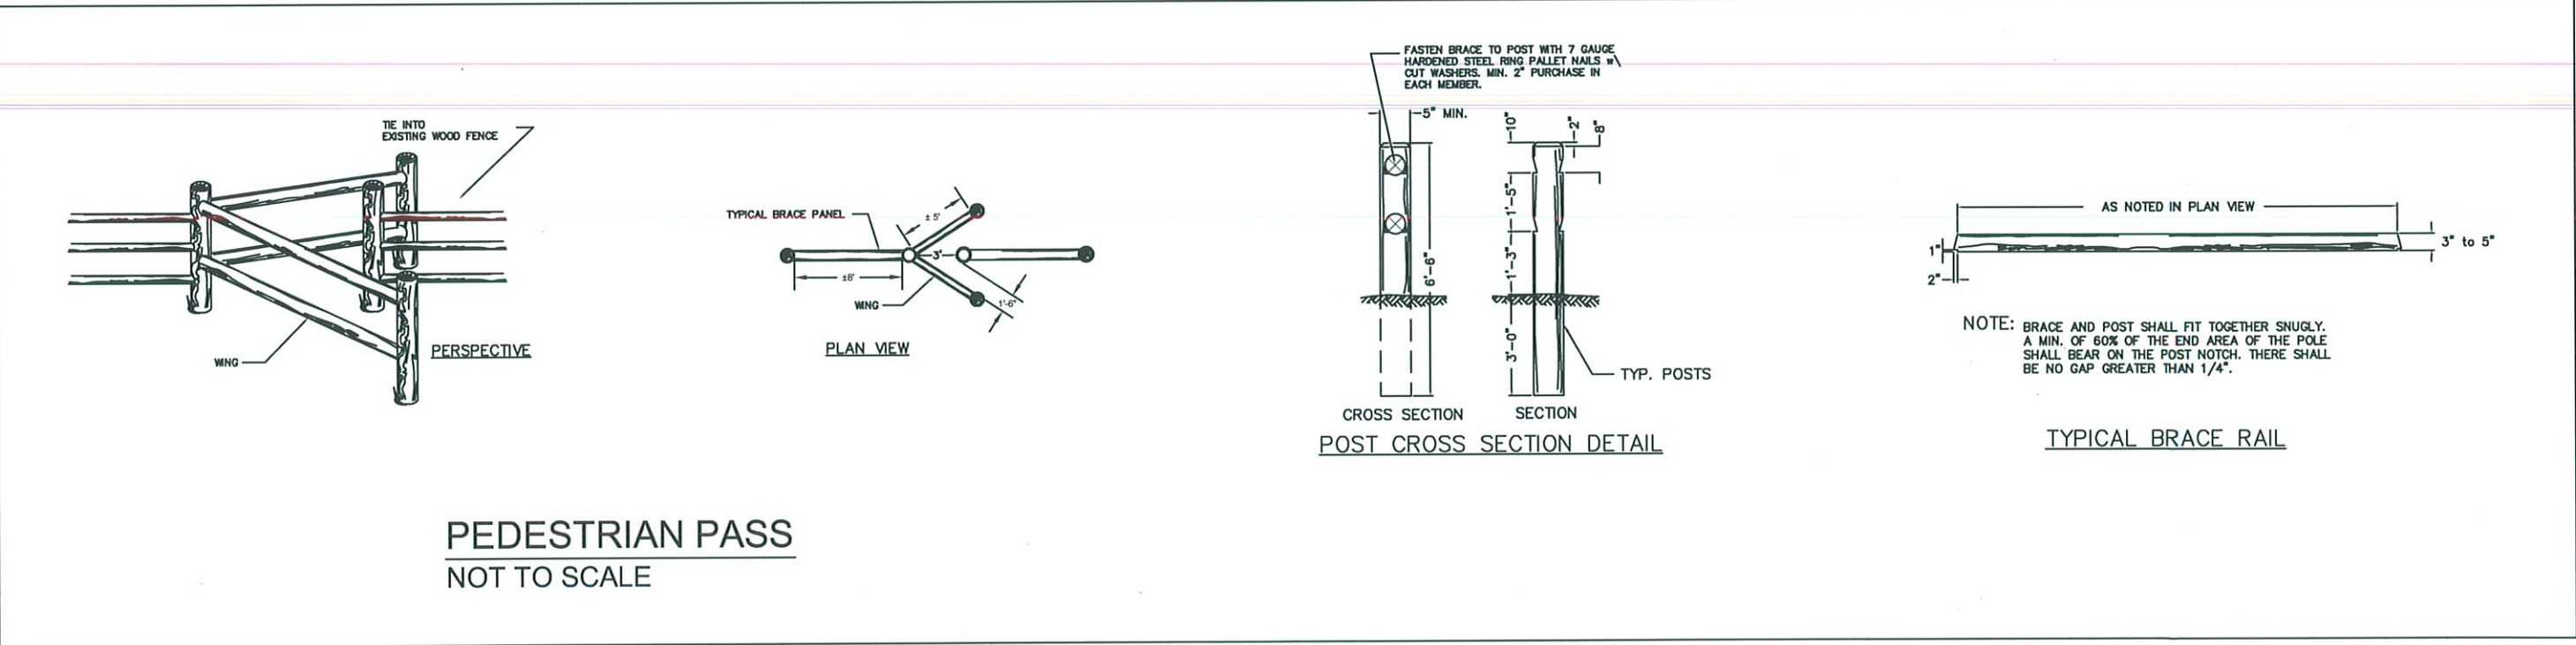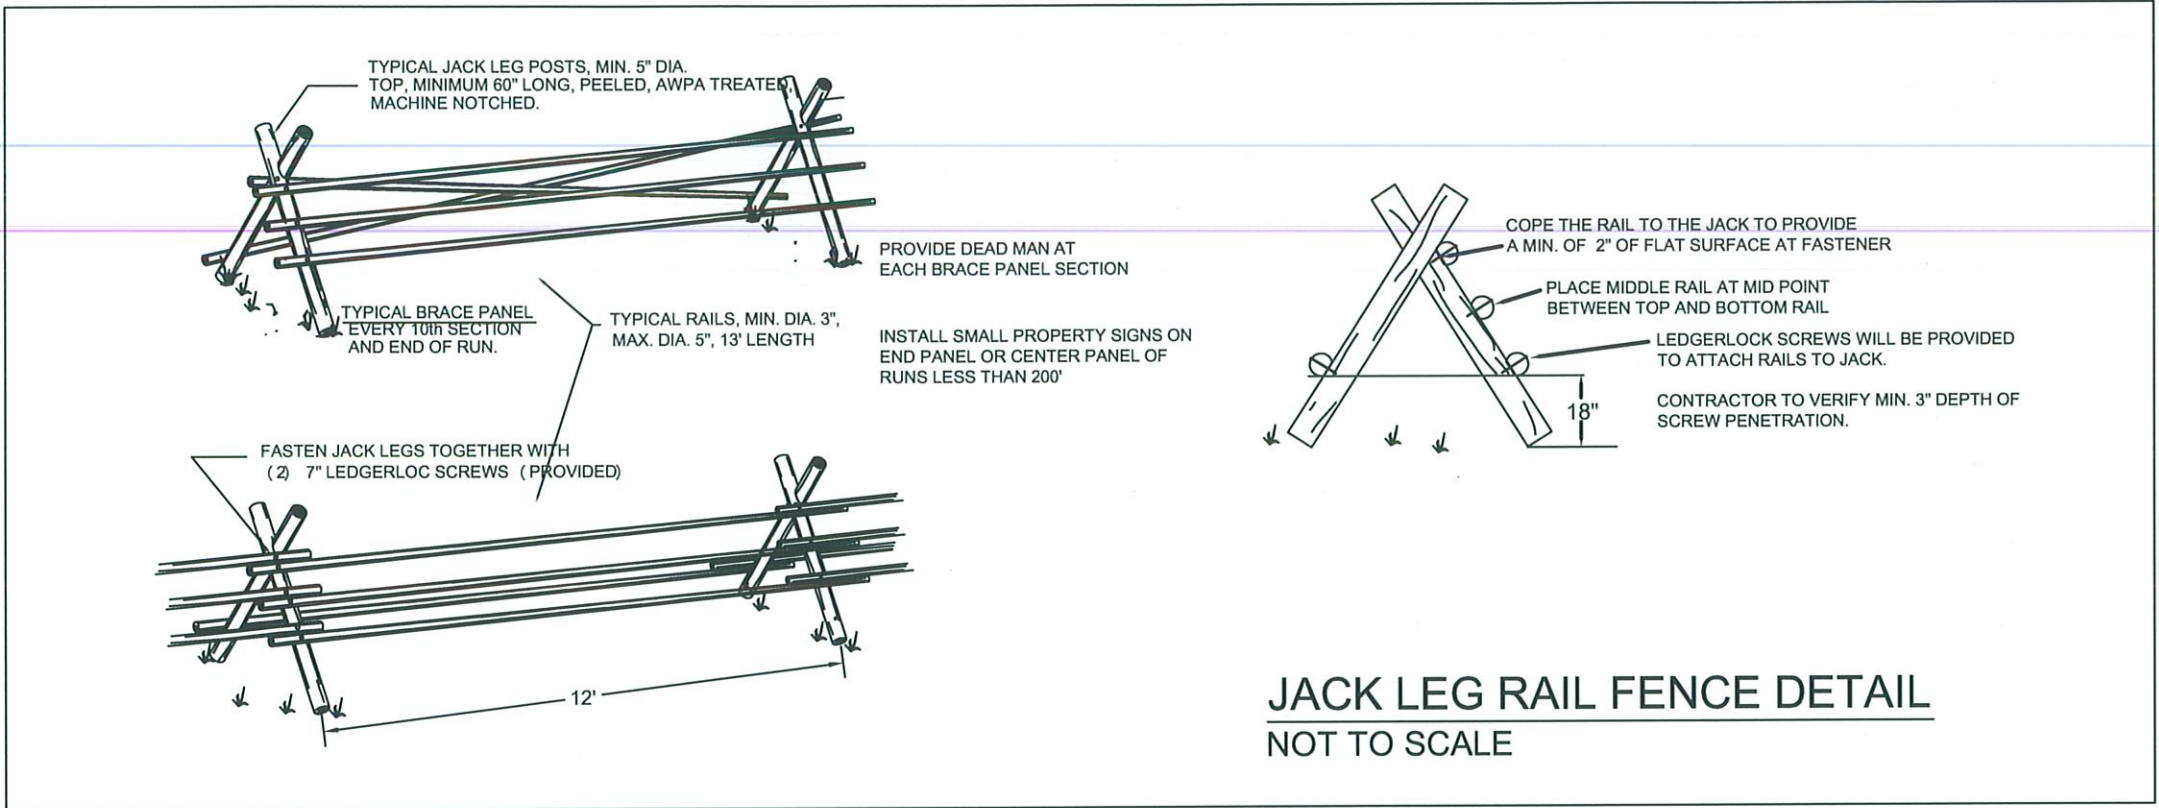

J. Kevin McDonnell	3.2013				
DRAWN BY:	DATE:	REVISED BY:	DATE:	APPROVED BY:	DATE:
CHECKED BY:	DATE:	APPROVED BY:	DATE:	APPROVED BY:	DATE:



**Montana Fish,
Wildlife & Parks**

Yellowstone River Wildlife Management Area
Pompey's Pillar, MT

SHEET: of
4 of 4