

ADDENDUM NO. 1


TO: ALL BIDDERS OF RECORD

PROJECT: Freezout Lake WMA Flume Replacement

FWP PROJECT #: 7135313

DATE: 8/14/15

FROM: Paul Valle, Montana FWP Project Manager

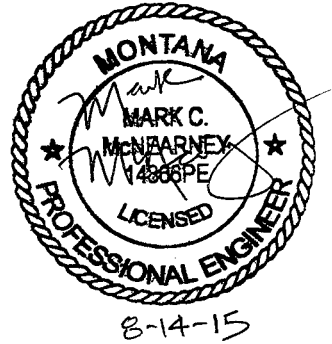

Acknowledge receipt of this addendum by inserting its number and date in the Proposal Form and on the Bid Envelope. Failure to do so may subject bidder to disqualification.

This Addendum forms a part of the Contract Documents. Clarification and/or modifications area as follows:

1. Bidders shall use new updated Bid proposal form to submit bids
2. Section 13630 Fiberglass Flume 2.1A.is amended to add 5. Cut Throat Flume shall include an 8" molded stilling well.
3. Plan sheets 2, 5 and 6 have been modified to adjust the Flume installation elevation and increase the headwall heights please use the new sheets #2, #5 and #6 for bidding.
4. Addendum plan sheet #1 has been added for the replacement of an existing half round water control structure and 30' 36" HPDE. This structure and pipe **must be installed prior to October 3, 2015**. The new half round structure shall be (42" 1/2 rnd @ 6' w/smooth 36" outlet to fit 36" HDPE) ID as manufactured by TrueNorth Steel, Inc 1501 S 30th St W Billings Montana or an approved equal.

REVISED PROPOSAL

FREEZOUT LAKE WMA FLUME REPLACEMENT FWP # 7135313

Montana Fish, Wildlife & Parks
Design and Construction
PO Box 200701
1522 9TH Avenue
Helena, Montana 59620-0701

The undersigned, having familiarized himself with the conditions of the work and the contract documents as prepared by Paul Valle; **P.O. Box 200701 Helena Montana 59620-0701; Phone 406 841-4013**, agrees to furnish all labor, materials, equipment, and services necessary to complete all general construction work, as bid herein, for a project entitled Freezout Lake WMA Flume Replacement in accordance with the Contract Documents including all Addenda. The bidder agrees to perform all the work described below at the price shown as follows:

Reminder To Contractors: All Unit Prices must be filled in on the Bid Form for a valid bid (18-2-303 MCA).

Base Bid:

Item #	Description	Estimated Quantity	Unit Measure	Unit Price	Total Amount
1	Mobilization and Demobilization	1	Lump sum		
2	Demolition and Disposal	1	Lump sum		
3	36" x 40' HDPE culvert (double wall smooth inside)	1	Lump sum		
4	New 36" Cut Throat Flume with concrete wing walls and concrete pad	1	Lump sum		
5	Reclamation and Revegetation	1	Lump sum		
6	36"X30' HPDE (double wall smooth inside) culvert and half round water control structure per addendum.	1	Lump sum		
Total: \$					

BASE BID: _____

_____ AND _____ /100 DOLLARS (\$) _____).

And certifies that he is a duly and regularly licensed contractor registered with the Montana Department of Labor and Industry:

FIRM NAME: _____

TELEPHONE #: _____ FAX#: _____

BY: _____

REGISTRATION # : _____

BUSINESS ADDRESS: _____


E-MAIL ADDRESS: _____



This bidder acknowledges receipt of the following addenda:

ADDENDUM NO. _____ DATED


ADDENDUM NO. _____ DATED

ADDENDUM NO. _____ DATED

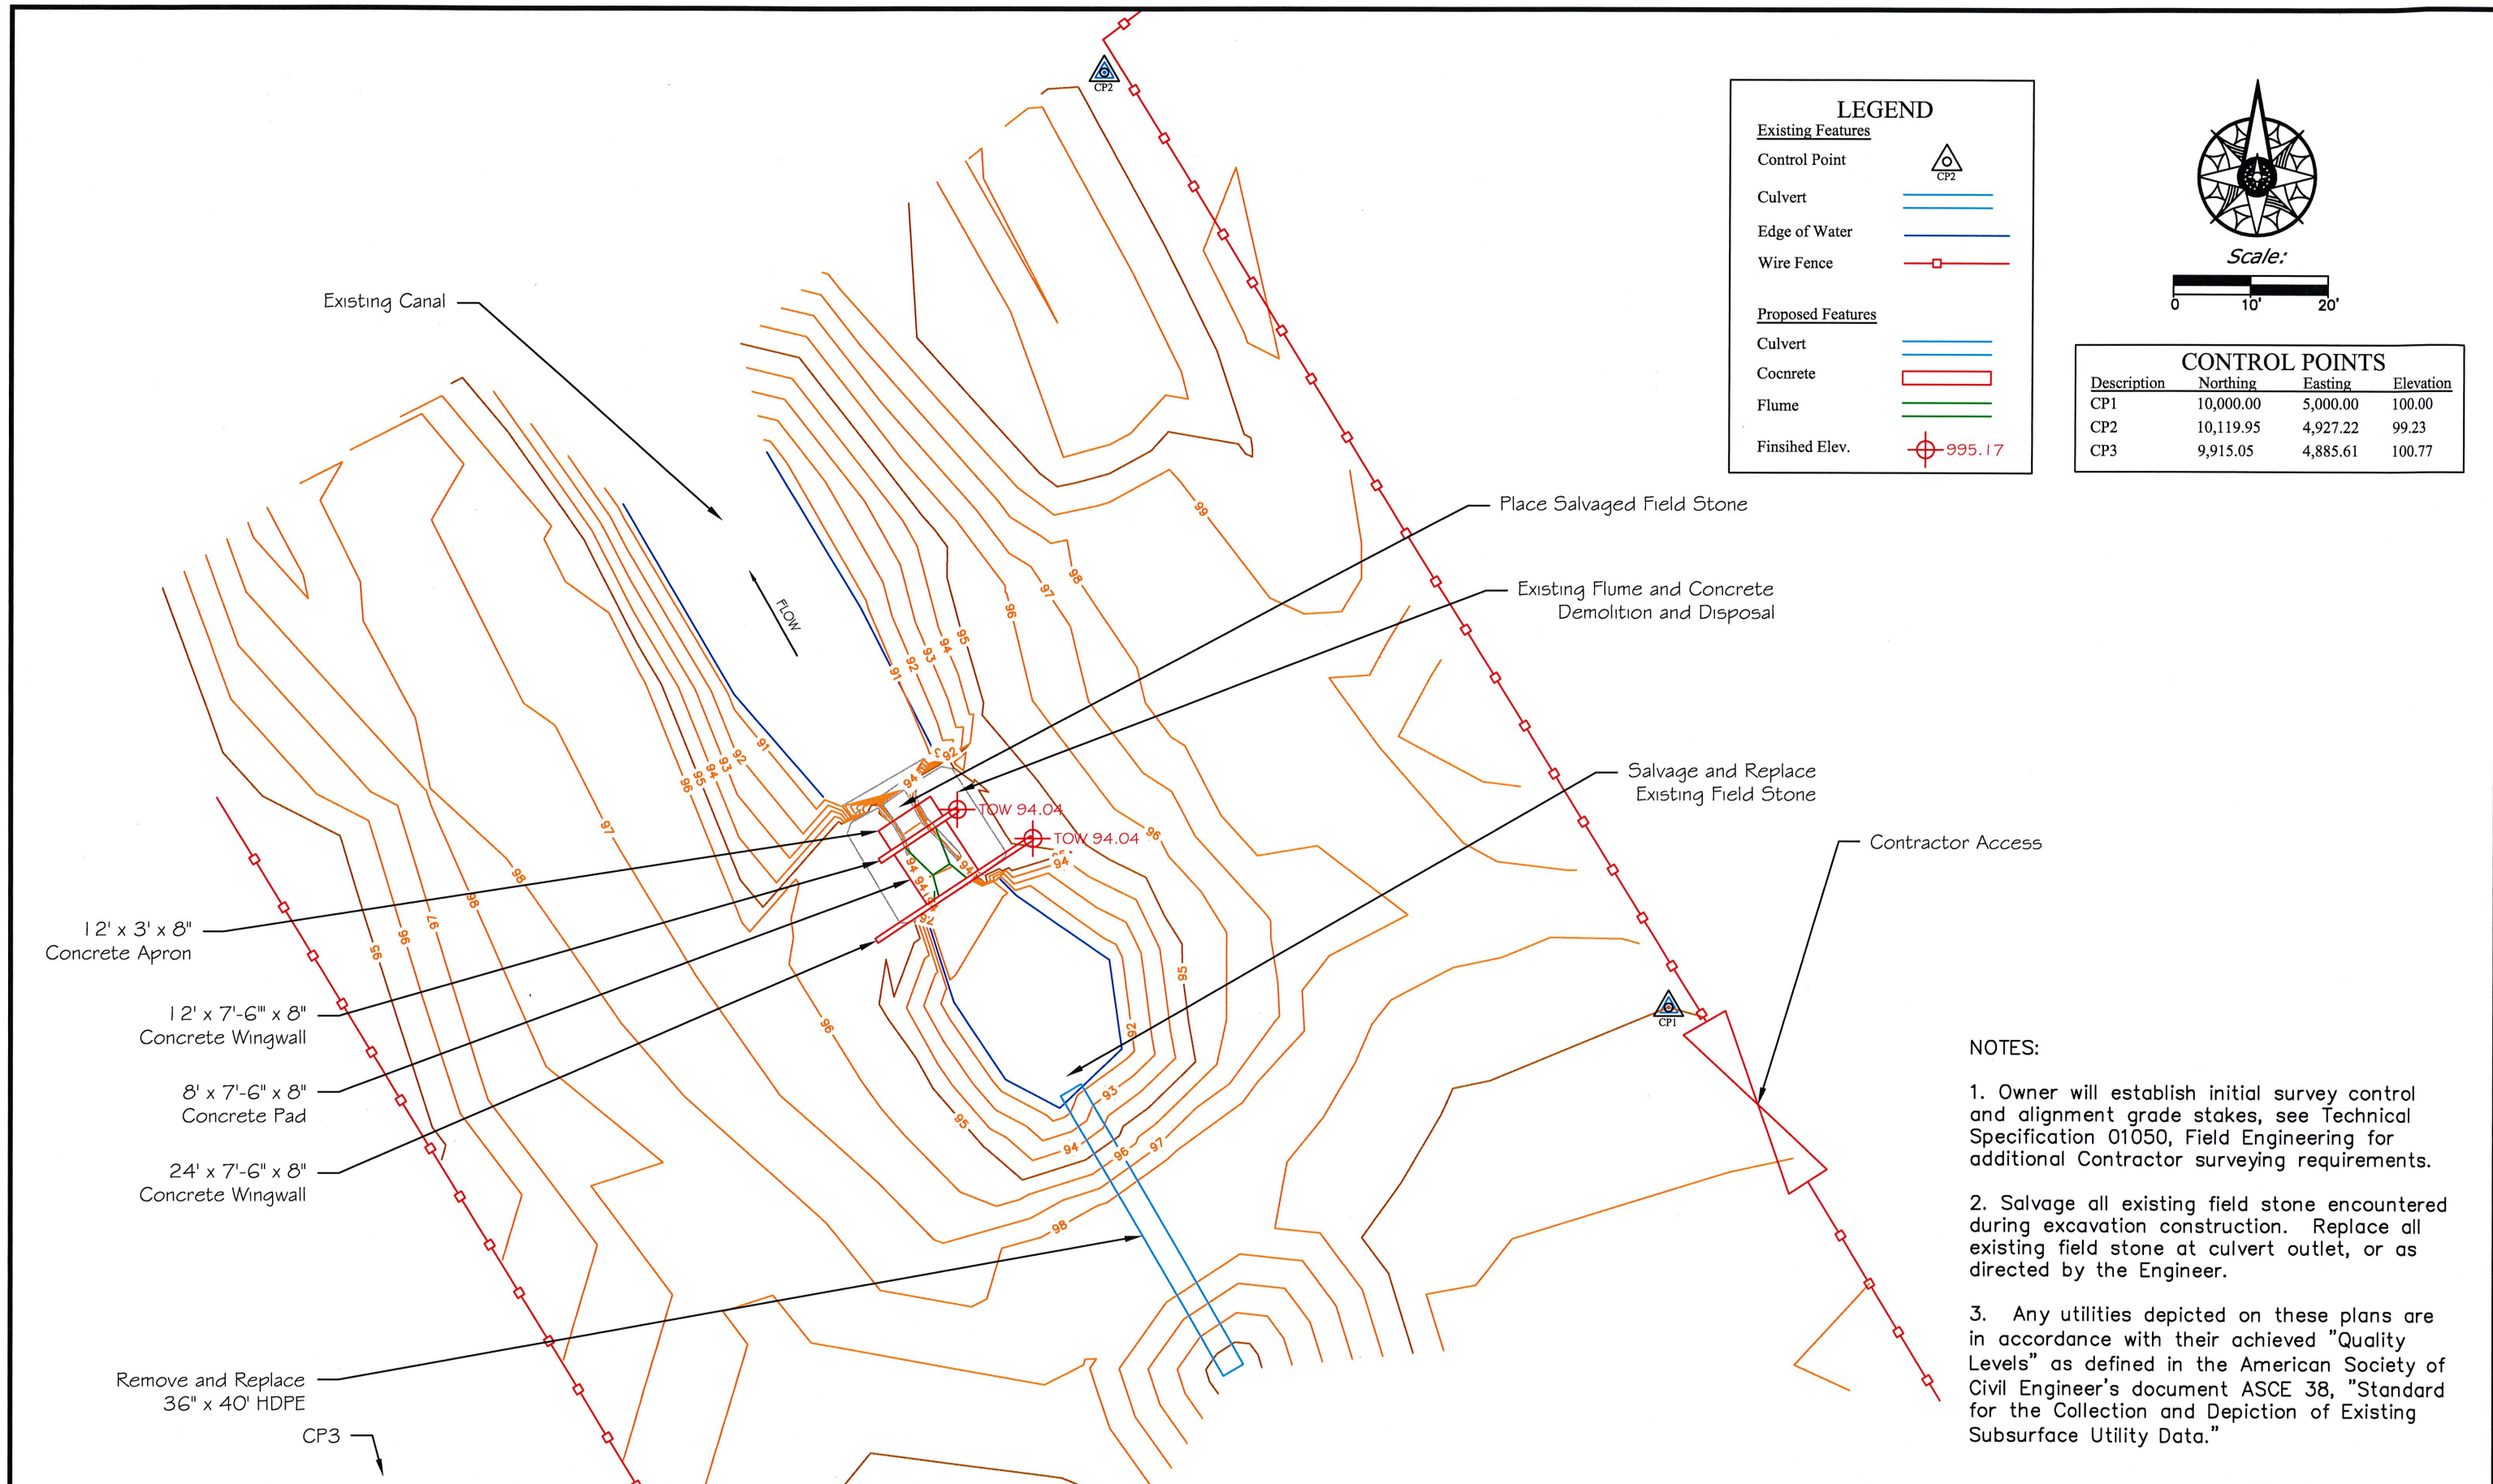


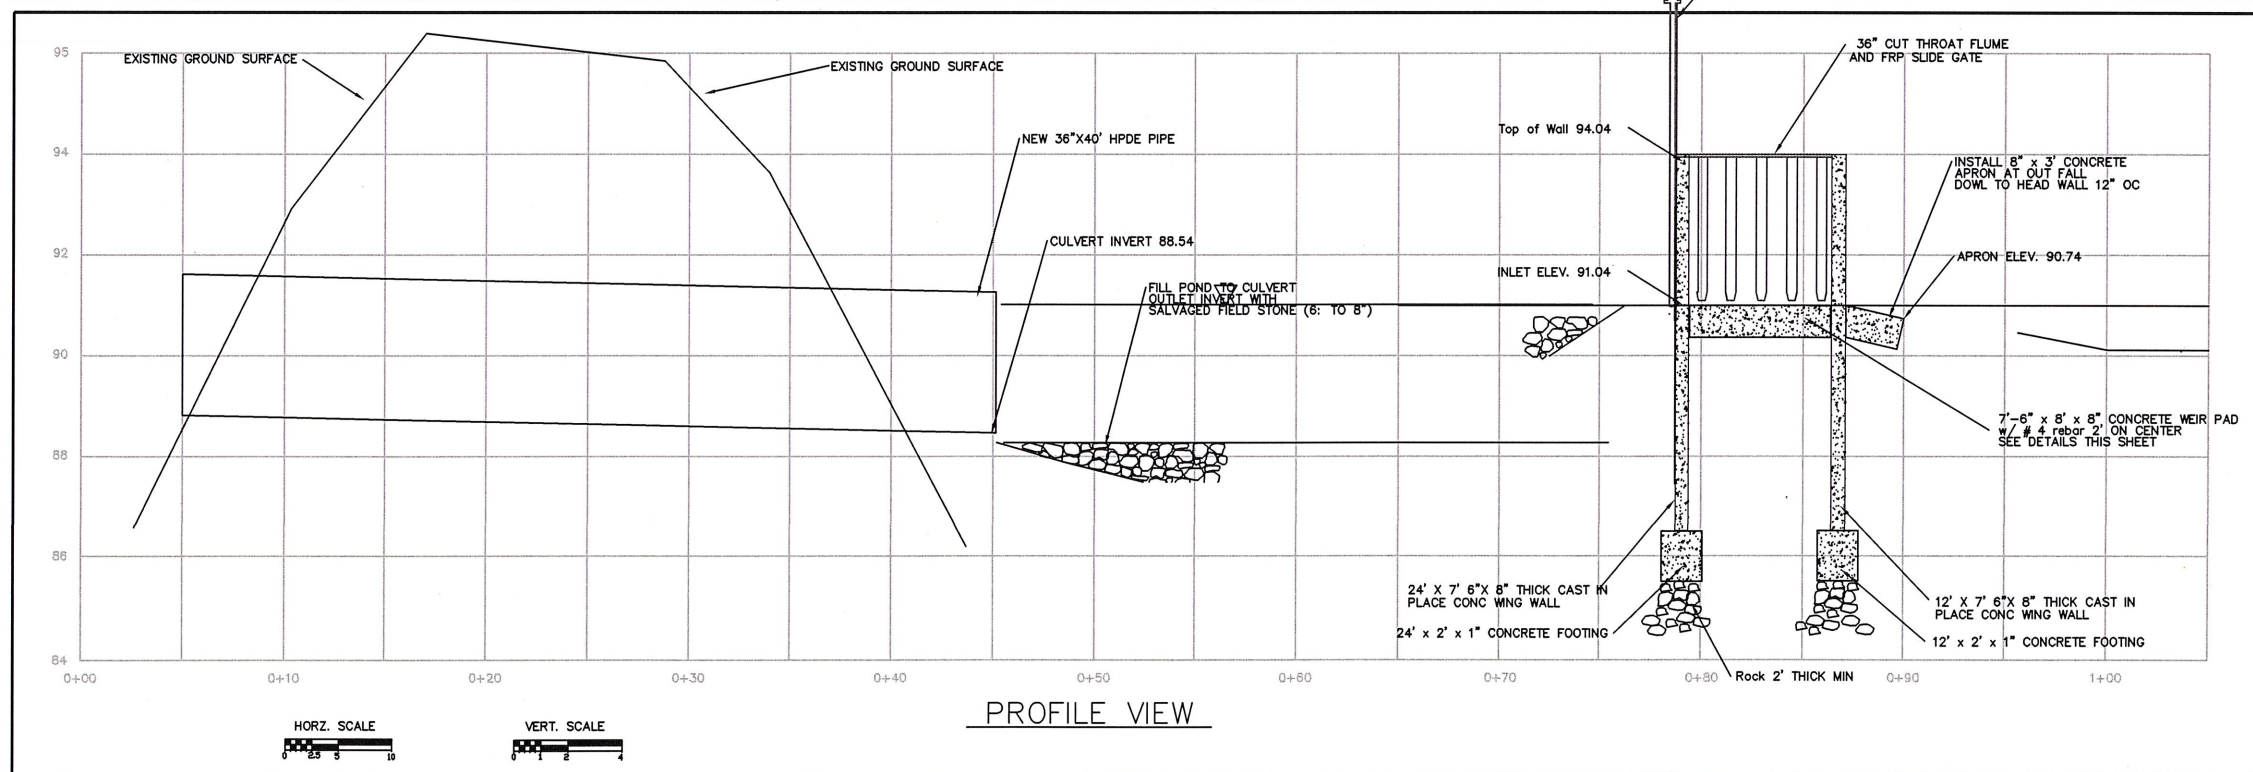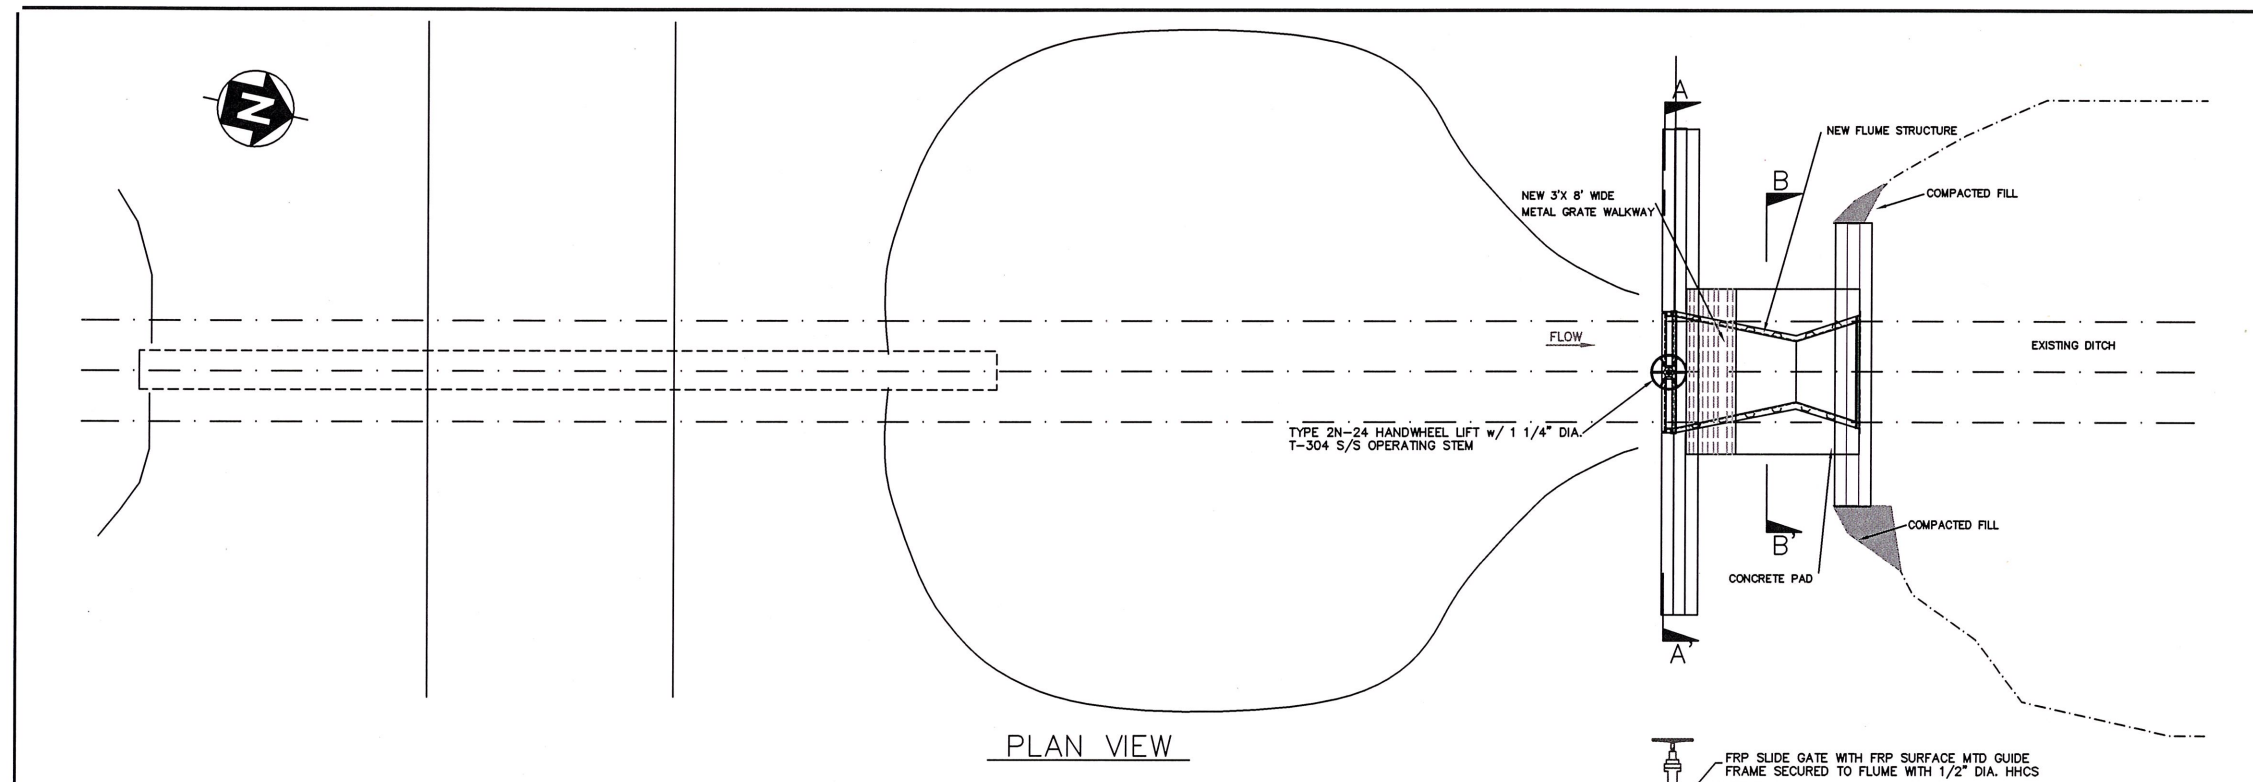


- NOTES:**
1. WATER SURFACE ELEVATIONS (W.S.) WILL VARY FROM THAT INDICATED.
 2. RESTORE TRENCH SURFACE TO MATCH EXISTING ELEVATIONS UNLESS OTHERWISE INDICATED.
 3. PROVIDE GALVANIZED WELDED BAR GRATING GW SERIES BY McNICHOLS WITH 2"x3/16" BEARING BARS 1 3/16" ON CENTER AND REGULAR CROSS BARS 4" ON CENTER.

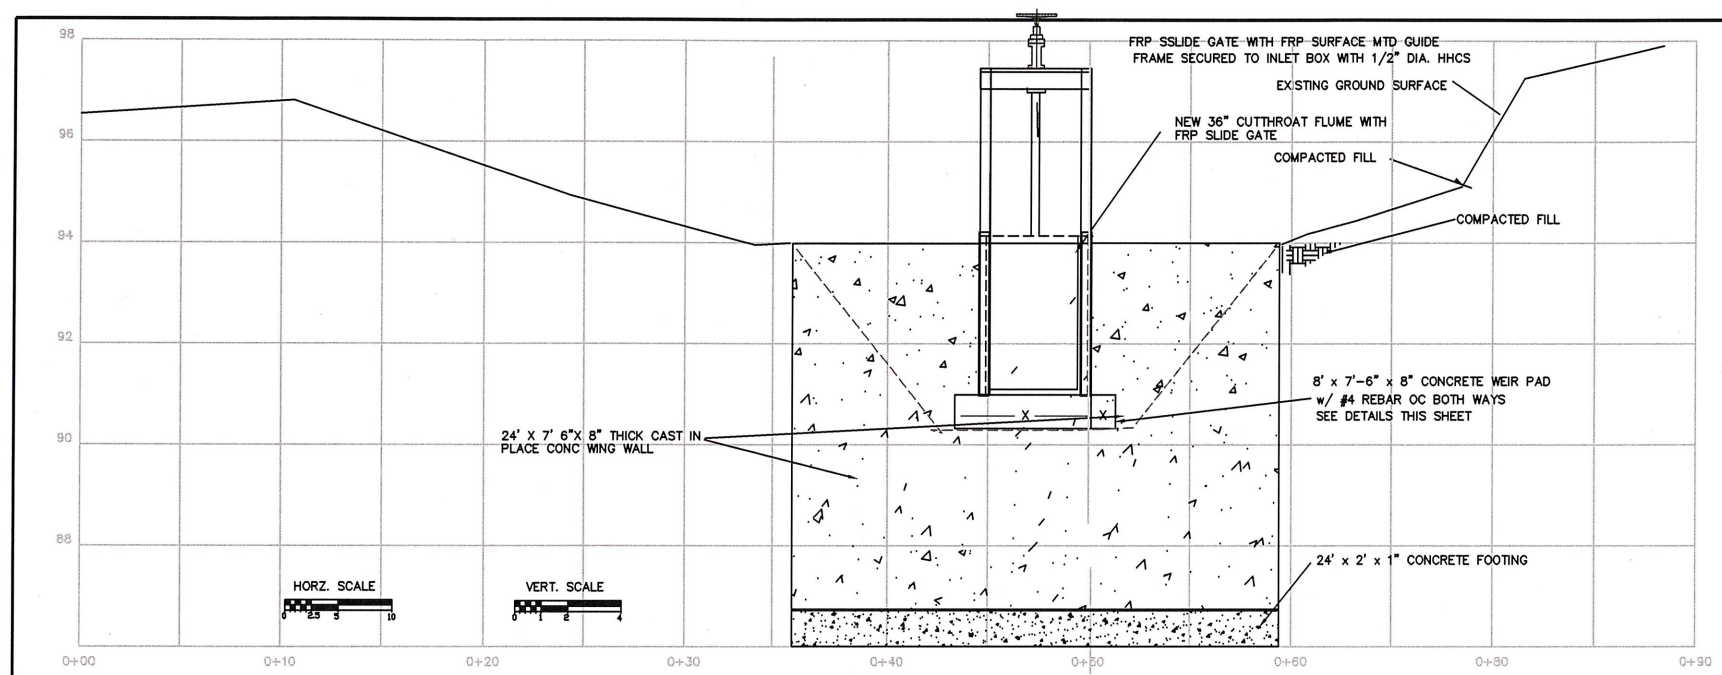

PROFILE THRU WEIR - SECTION A-A'

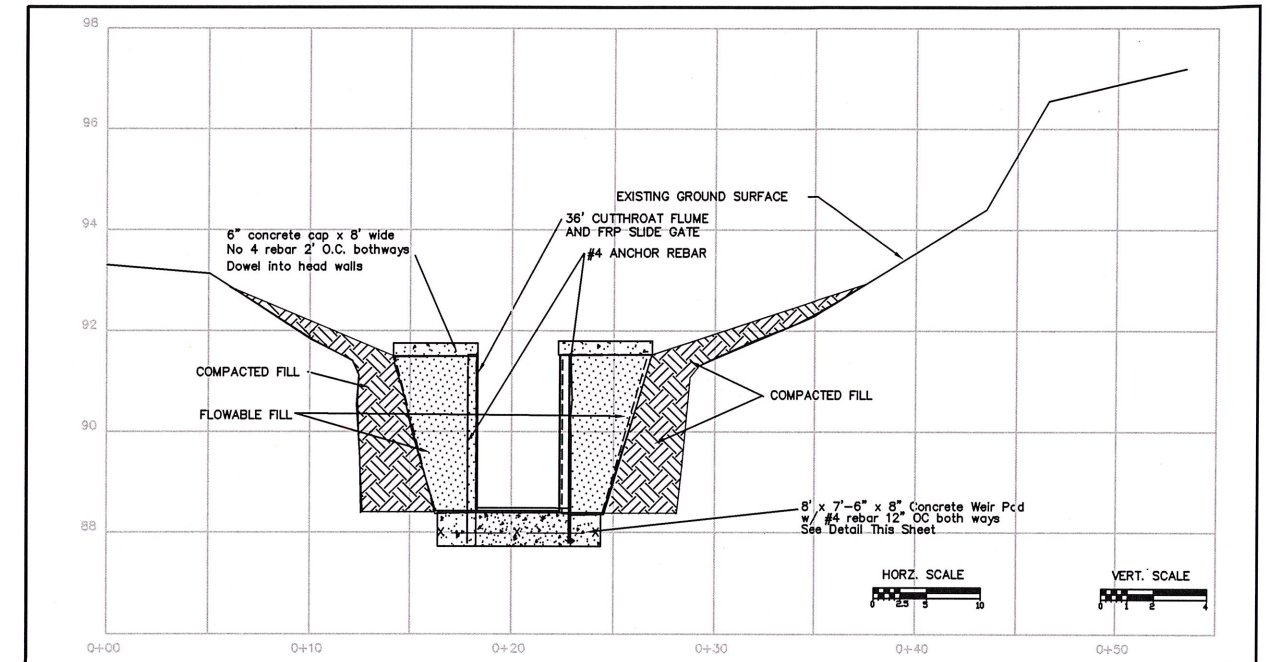


PROFILE THRU WEIR - SECTION B-B'

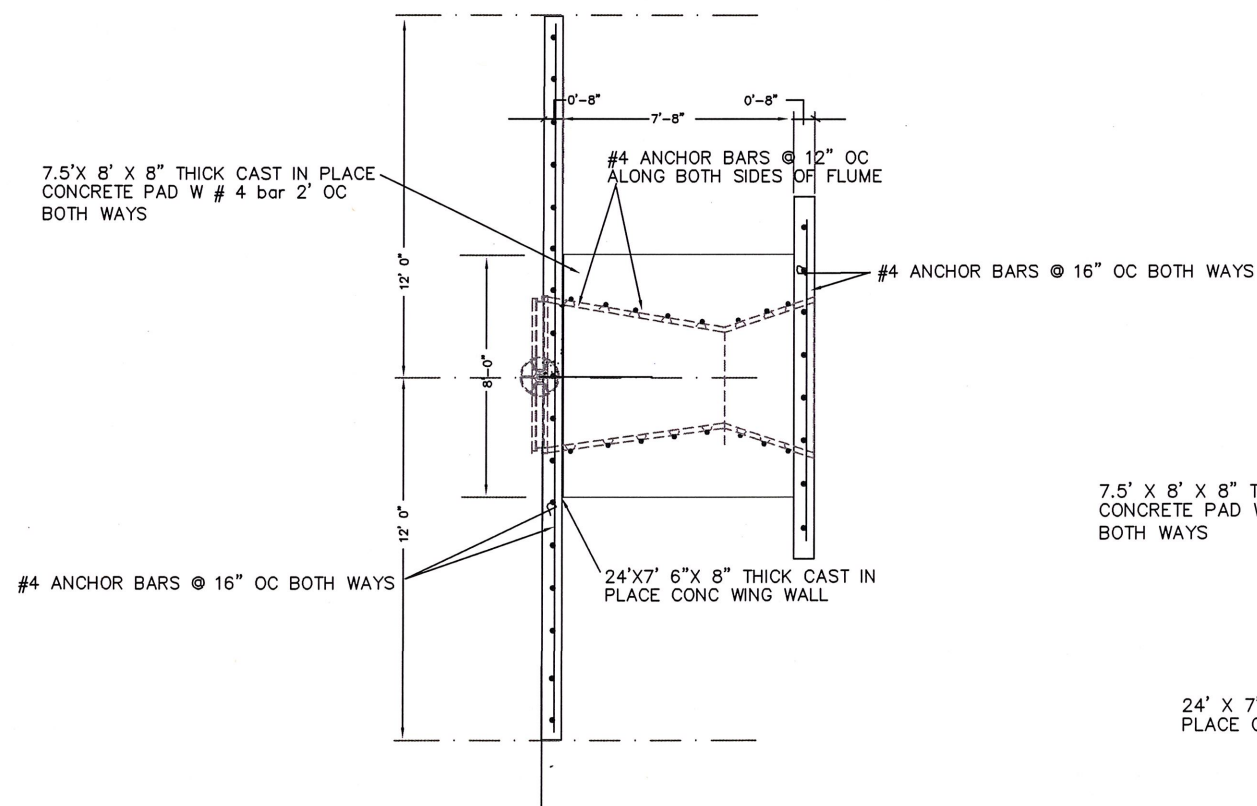

PLAN VIEW

FLUME STRUCTURE


NOT TO SCALE

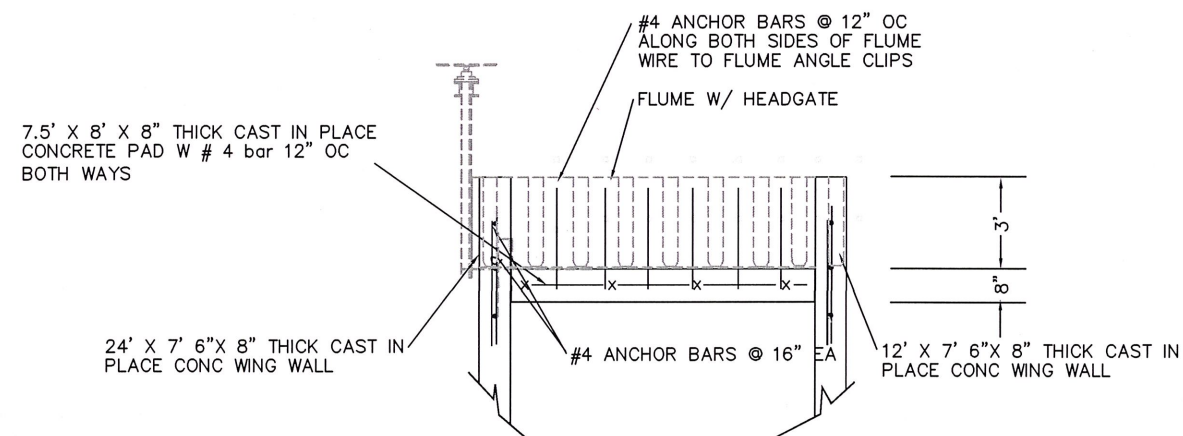

ELEVATION VIEW

FLUME STRUCTURE

NOT TO SCALE

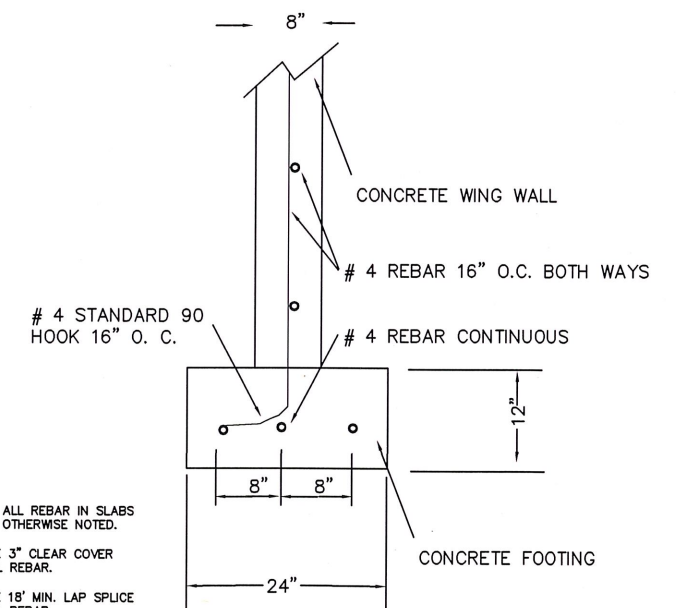

ELEVATION VIEW

FOOTING DETAIL

NOT TO SCALE

- NOTES:
1. CENTER ALL REBAR IN SLABS UNLESS OTHERWISE NOTED.
 2. PROVIDE 3" CLEAR COVER FOR ALL REBAR.
 3. PROVIDE 18" MIN. LAP SPLICE FOR ALL REBAR.


P. Valle	July, 2015				
DRAWN BY:	DATE:	REVISED BY:	DATE:	APPROVED BY:	DATE:
CHECKED BY:	DATE:	APPROVED BY:	DATE:	APPROVED BY:	DATE:



Montana Fish & Wildlife

New Flume Elevations/Details
Freezout Lake WMA (near Fairfield, MT)


SHEET: 6 of 6

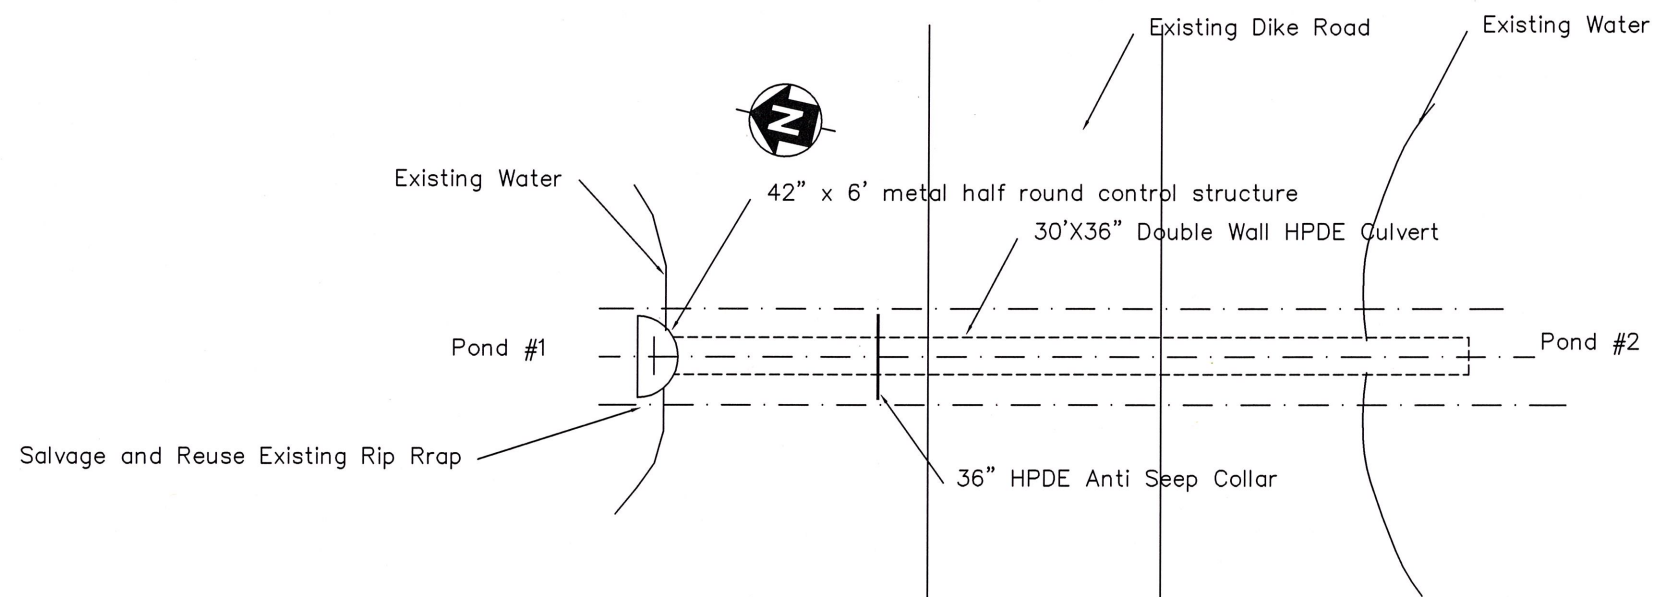



Note: Salvage Existing 36" x30' metal pipe to owner. Deliver to WMA headquarters.

PLAN VIEW

Project Location

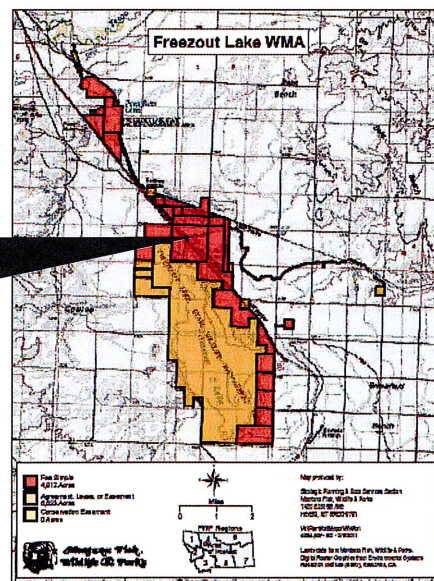

Std stop log guide

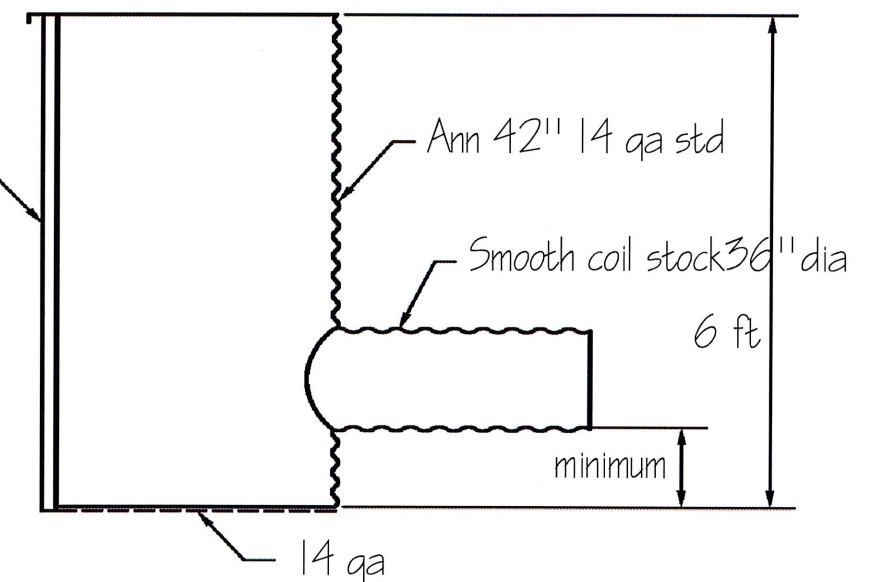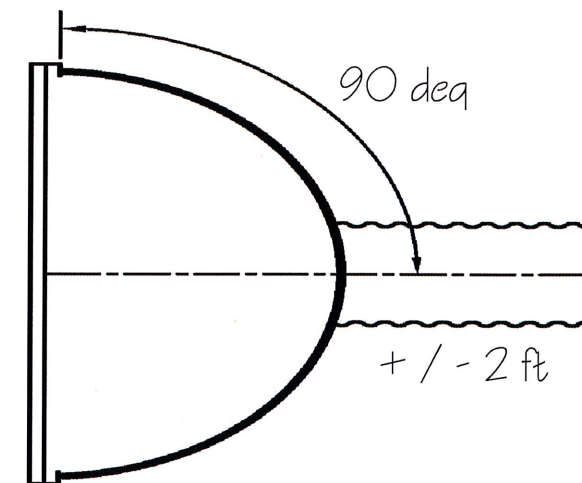

Half Round Water Control Structure

P. Valle August 2015
DRAWN BY: DATE:
CHECKED BY: DATE:

REVISED BY: DATE:
APPROVED BY: DATE:

APPROVED BY: DATE:
APPROVED BY: DATE:



**Montana Fish,
Wildlife & Parks**

Addendum-Pipe Replacement
Freezout Lake WMA (near Fairfield, MT)

SHEET: 1
of 1