

**Montana Fish,
Wildlife & Parks**



MOUNT SILCOX WMA
BOUNDARY FENCE
FWP PROJECT #7155301

SHEET INDEX

1. Title Sheet
2. Boundary Fence Extents
3. Segment B
4. Segment D
5. Segment E
6. Segment G Wildlife Crossings
7. Segment H
8. Fencing Details



Montana Fish, Wildlife & Parks
Design & Construction
1522 Ninth Ave.
PO Box 200701
Helena, MT 59620-0701
406-841-4000 (ph)
406-841-4004 (fax)

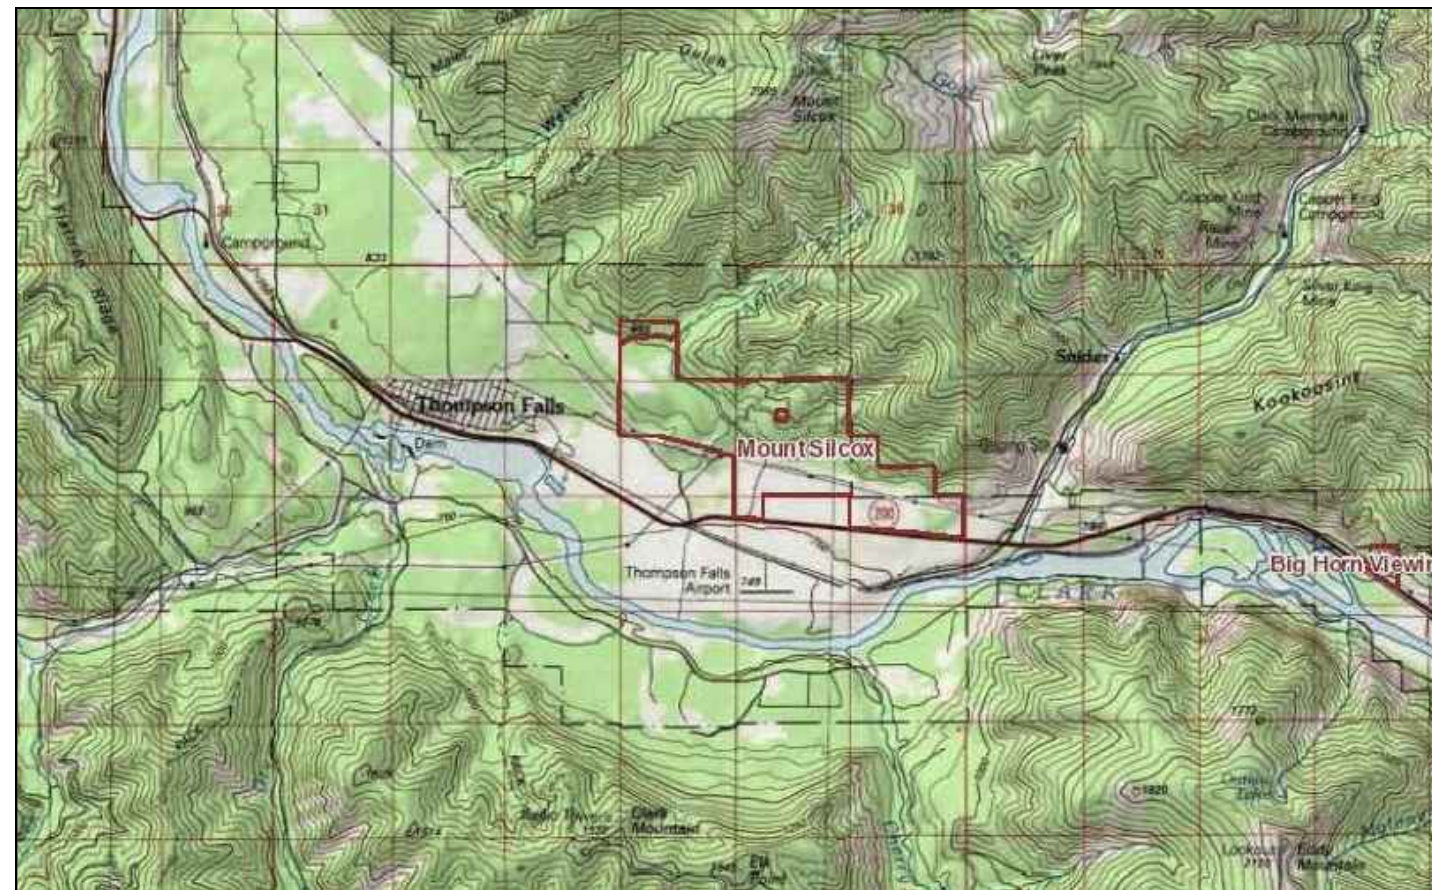


T. Monroe	7/2016				
DRAWN BY:	DATE:	REVISED BY:	DATE:	APPROVED BY:	DATE:
CHECKED BY:	DATE:	APPROVED BY:	DATE:	APPROVED BY:	DATE:



**Montana Fish,
Wildlife & Parks**

Title Sheet
Mt Silcox WMA (near Thompson Falls, MT)

SHEET: 1
of 8

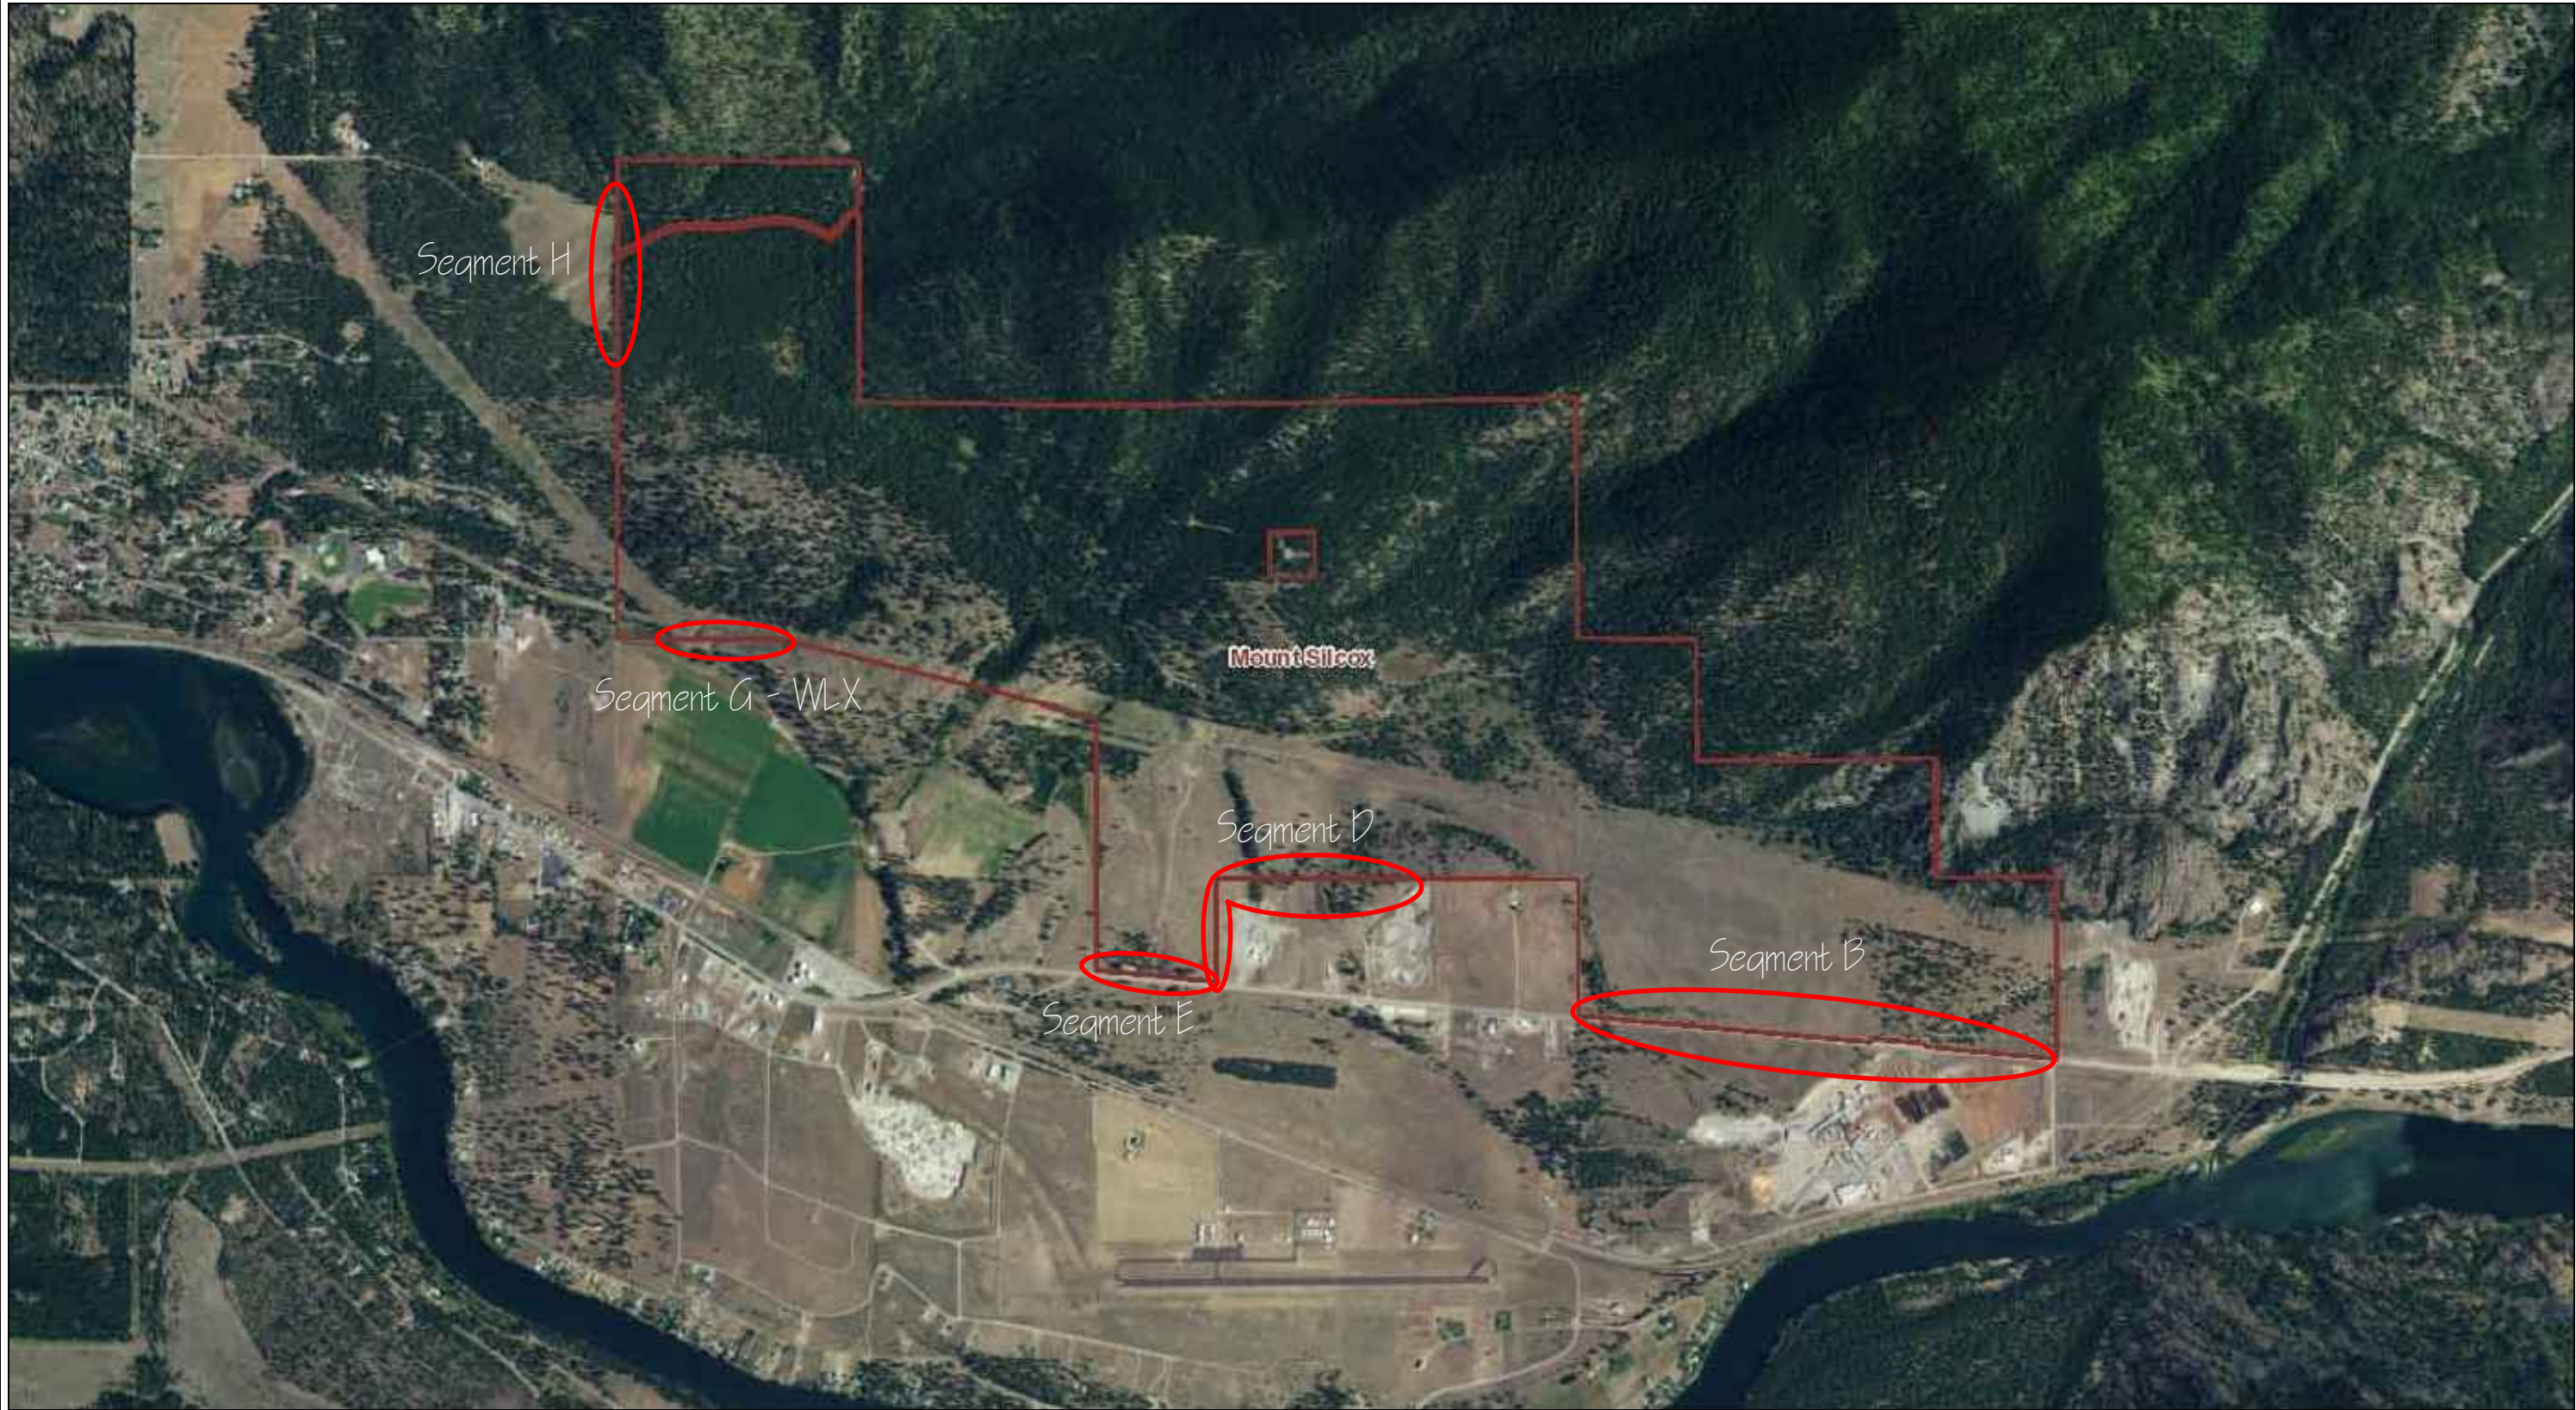

T. Monroe	7/2016
DRAWN BY:	DATE:
CHECKED BY:	DATE:

REVISED BY:	DATE:
APPROVED BY:	DATE:


APPROVED BY:	DATE:
APPROVED BY:	DATE:



**Montana Fish,
Wildlife & Parks**

Boundary Fence Extents
Mt Silcox WMA (near Thompson Falls, MT)

SHEET: 2
of 8

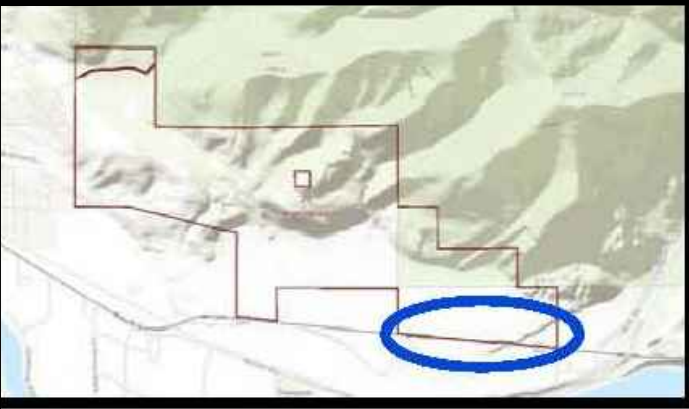

Segment B


- B1 (790 ft) (E) tee posts (sight), wood brace panels (x5) - (full removal)
(P) 3 strand smooth, new tee posts, new wooden brace panels (x5), new wood posts (x4)
- B2 (1,700 ft) (E) wood posts (1/rod), wood brace panels (x5) - (full removal)
(P) 3 strand smooth, new tee posts, new wood posts, new wood brace panels (x19)
- B3 (1,550 ft) (E) tee posts (sight), wood brace panels (x5) - (full removal)
(P) 3 strand smooth, existing wood posts, new wood brace panels (x9)
- B4 (1,270) (E) wood posts (1/rod), wood brace panels (x5) - (full removal)
(P) 3 strand smooth, new tee posts, new wood brace panels (x4)

Mt Silcox WMA - Segment B



Notes:
(E) Existing fence
(P) Proposed Fence

All fence begin and end at property lines. Replace only those sections shown in blue on the drawings. Do not disturb adjacent fence.

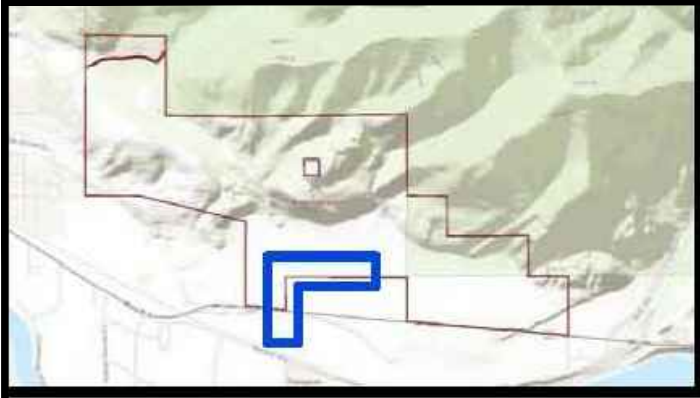

Segment D

- D1 (960 ft) (E) 5 strand barb, tee posts, wood brace panels (full removal)
(P) 4 strand barb, new tee posts, new wood posts, new wooden brace panels
- D2 (2,190 ft) (E) 4 strand barb, tee posts, wood brace panels (full removal)
(P) 3 strand smooth, new tee posts, new wood posts, new wooden brace panels (x7)

Mt Silcox WMA - Segment D



Notes:
(E) Existing fence
(P) Proposed Fence

All fence begin and end at property lines. Replace only those sections shown in blue on the drawings. Do not disturb adjacent fence.



Segment E

- E1 (970 ft) (E) tee posts (sight), wood brace panels (full removal)
 (P) 3 strand smooth, new tee posts, new wooden brace panels (x11)
- E2 (366 ft) (E) tee posts (sight), wood brace panels, vehicle gates, man gate (full removal)
 (P) 3 strand barb, new tee posts, new wooden brace panels (x9), new 16', reuse man gate
- E1 (300 ft) (E) tee posts (sight), wood brace panels (full removal)
 (P) 3 strand smooth, new tee posts, new wooden brace panels (x4)



Notes:
 (E) Existing fence
 (P) Proposed Fence

All fence begin and end at property lines. Replace only those sections shown in blue on the drawings. Do not disturb adjacent fence.

T. Monroe 7/2016
 DRAWN BY: DATE:
 CHECKED BY: DATE:

REVISED BY: DATE:
 APPROVED BY: DATE:


APPROVED BY: DATE:
 APPROVED BY: DATE:



**Montana Fish,
 Wildlife & Parks**

Segment E
 Mt Silcox WMA (near Thompson Falls, MT)

SHEET: 4
 of 8

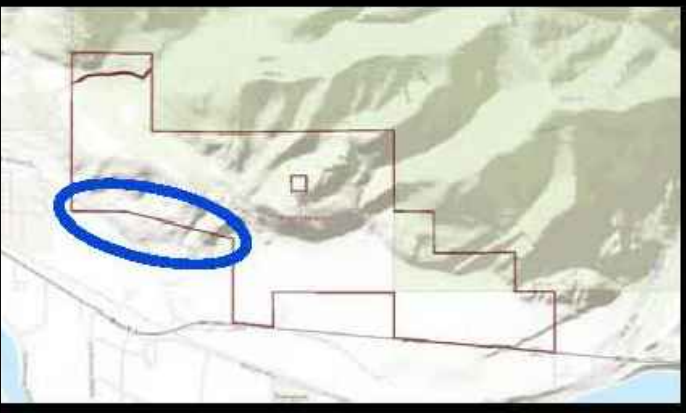

Segment G

- G1 (5300 ft)

(E) 4 strand ~~hard to replace with immediate fiberglass~~ (retack, replace approx. 10 tee posts)
- WLX

(P) 3 strand barb,1 strand smooth, wood brace panels with wood rail (see detail) (x3)

Not in Contract (G1)



Notes:
(E) Existing fence
(P) Proposed Fence
(WLX) Wildlife Crossing

All fence begin and end at property lines. Replace only those sections shown in blue on the drawings. Do not disturb adjacent fence.

T. Monroe	7/2016
DRAWN BY:	DATE:
CHECKED BY:	DATE:

REVISED BY:	DATE:
APPROVED BY:	DATE:


APPROVED BY:	DATE:
APPROVED BY:	DATE:



**Montana Fish,
Wildlife & Parks**

Segment G Wildlife Crossings
Mt Silcox WMA (near Thompson Falls, MT)


SHEET: 6 of 8

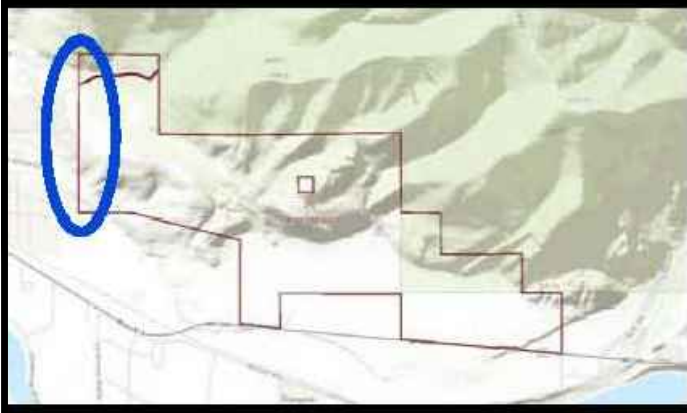

Segment H










- H1 (2,670 ft) (E) 4 strand barb, tee posts, wood brace panels (keep)
(P) Retack, remove or lower top strand to a maximum height of 40"
- H2 (2,130 ft) (E) 4 strand barb, tee posts, wood posts, tree anchors, wood brace panels (full removal)
(P) 4 strand barb, new tee posts, new tree anchors, new wooden brace panels (x4)
keep metal gate, may need clearing of trees <6" in diameter

Not in Contract (H1)

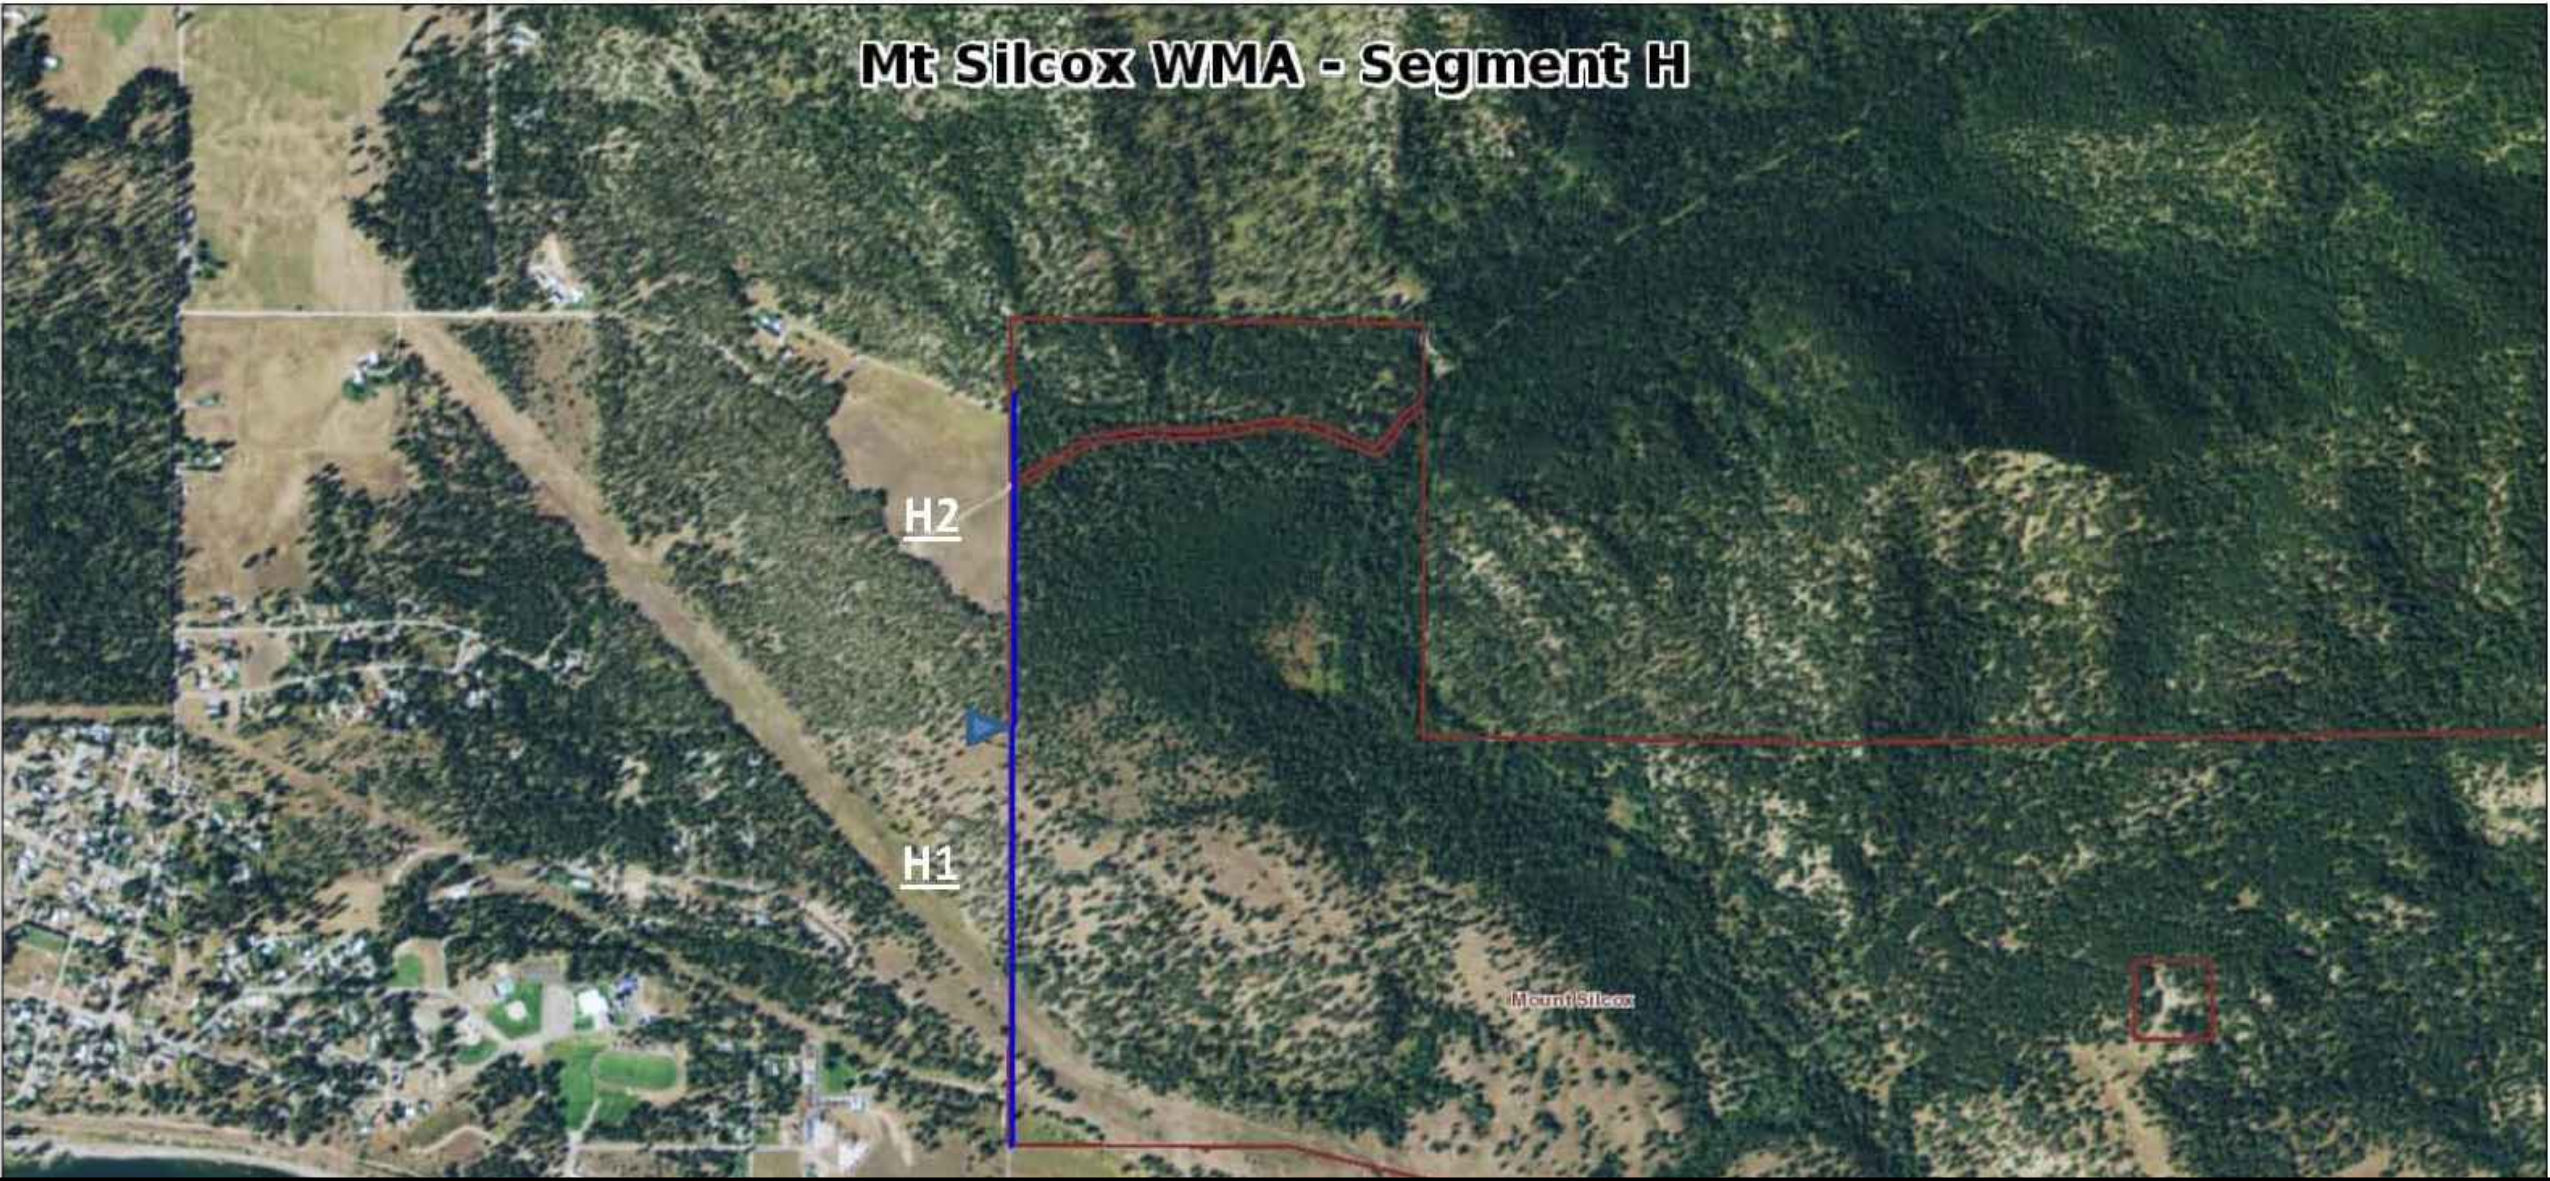

Notes:
(E) Existing fence
(P) Proposed Fence

All fence begin and end at property lines. Replace only those sections shown in blue on the drawings. Do not disturb adjacent fence.

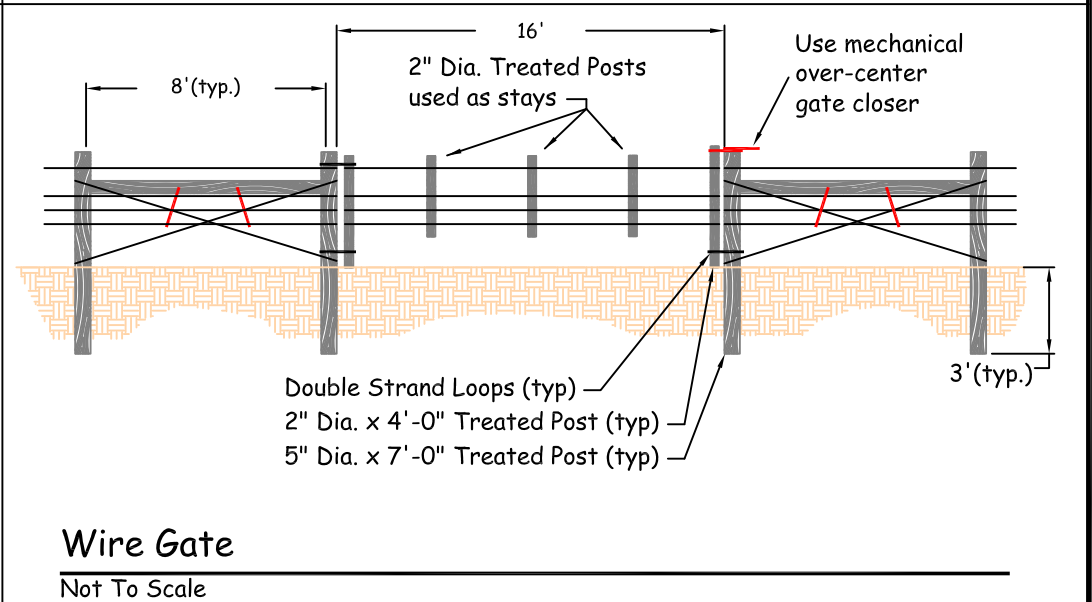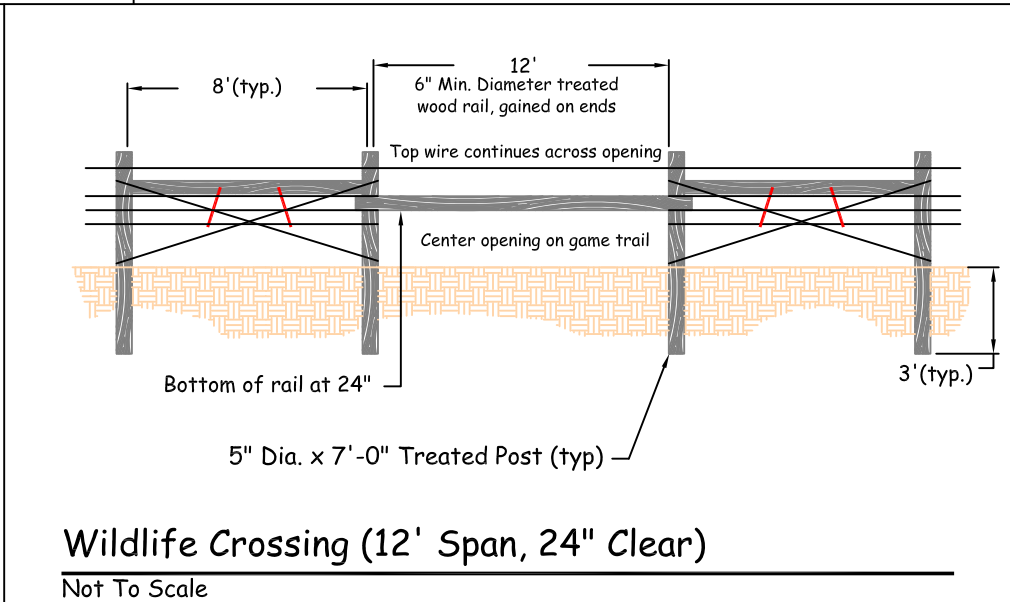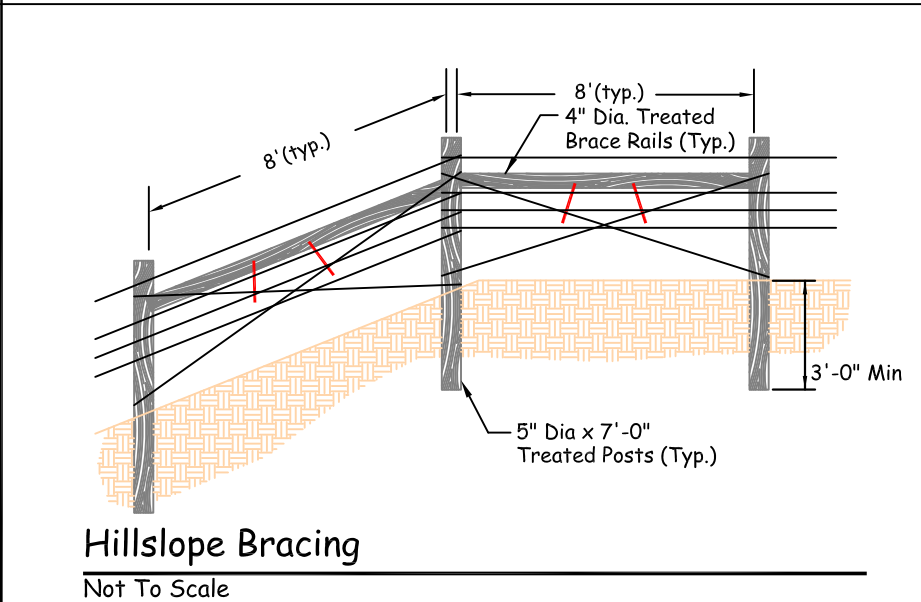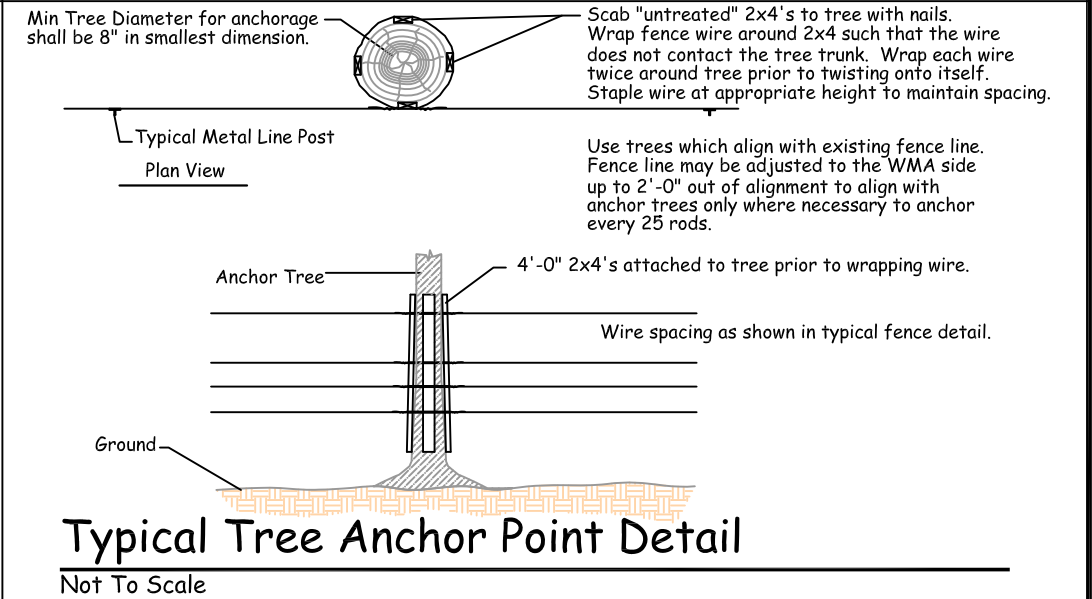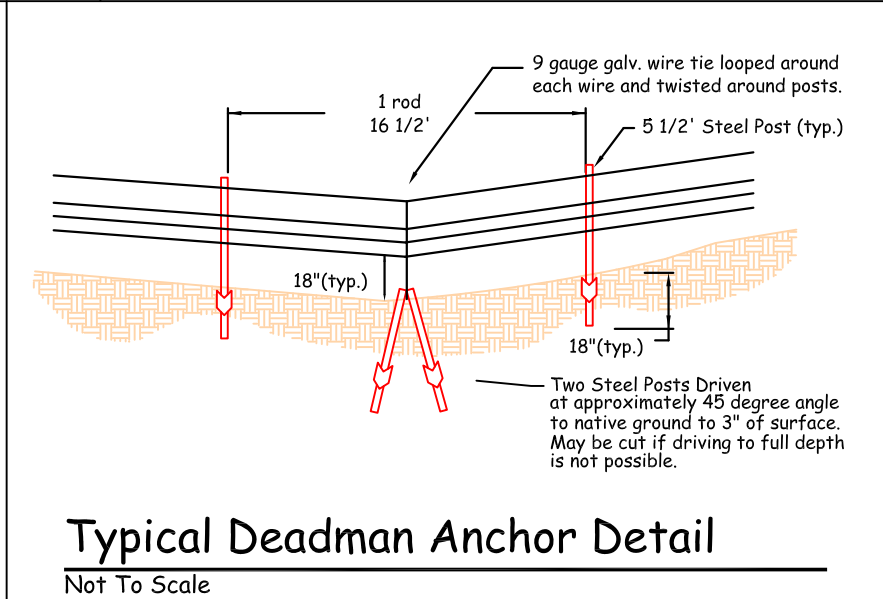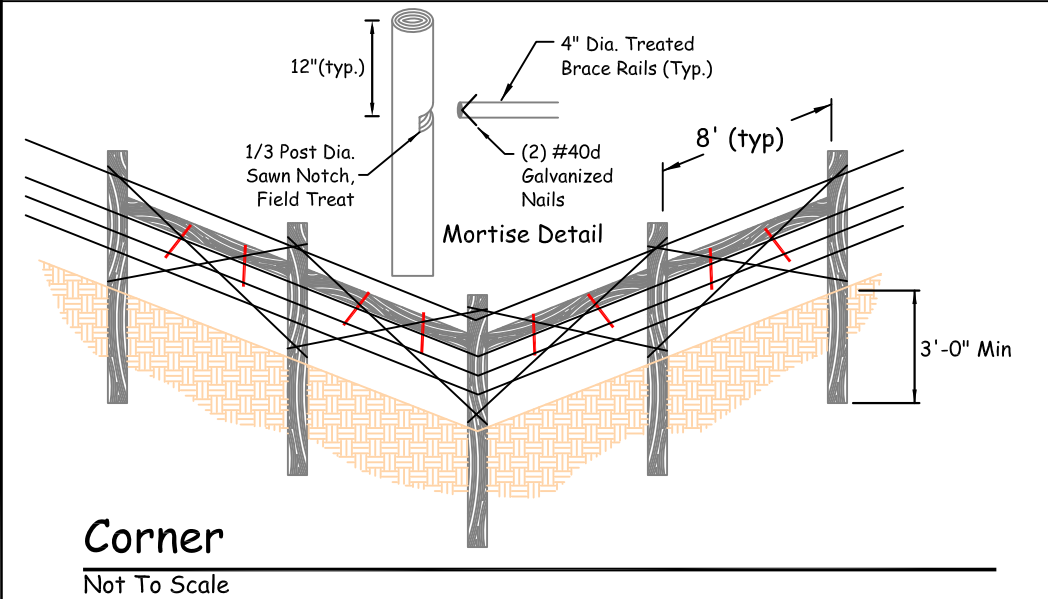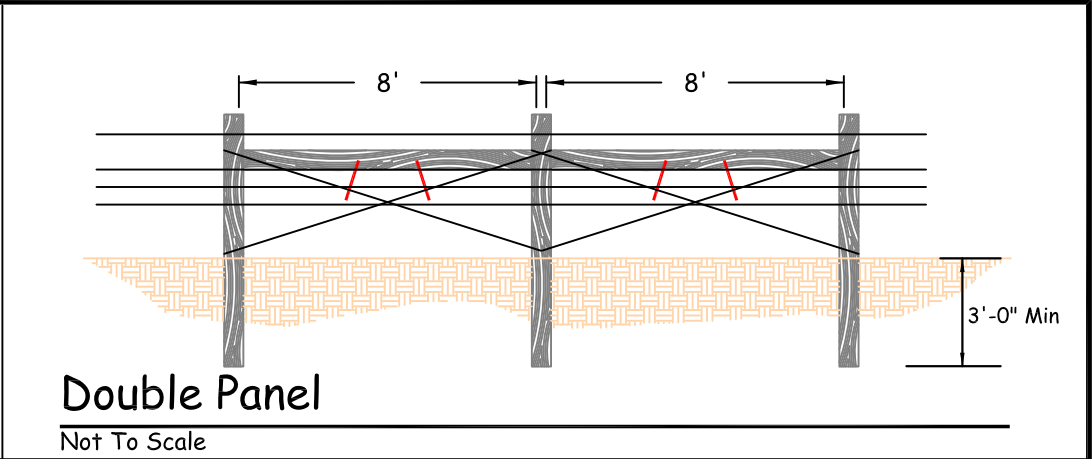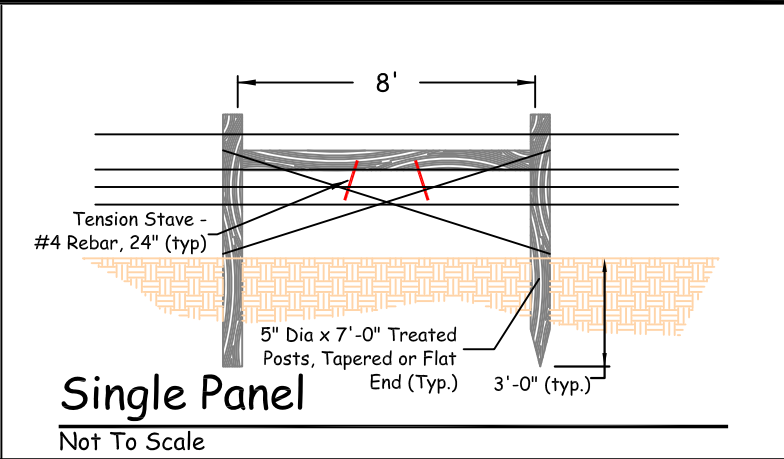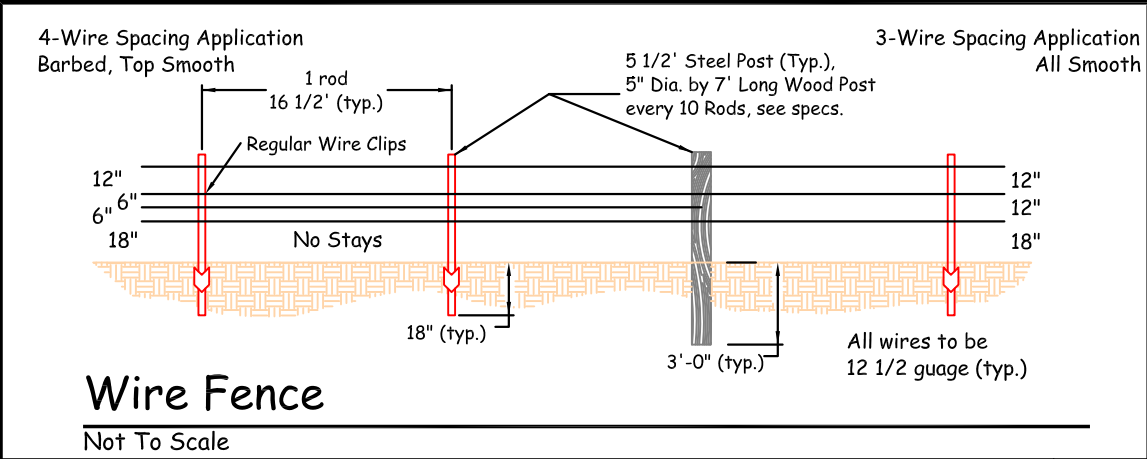

T. Monroe	4/2016				
DRAWN BY:	DATE:	REVISED BY:	DATE:	APPROVED BY:	DATE:
CHECKED BY:	DATE:	APPROVED BY:	DATE:	APPROVED BY:	DATE:



**Montana Fish,
Wildlife & Parks**

Fencing Details
Mt Silcox WMA (near Thompson Falls, MT)

SHEET: 8 of 8