


MONTANA FISH, WILDLIFE & PARKS

PROPOSED RE-ROOFING AT GIANT SPRINGS TROUT HATCHERY

Near Great Falls, MT


(REBID 2) #19-01

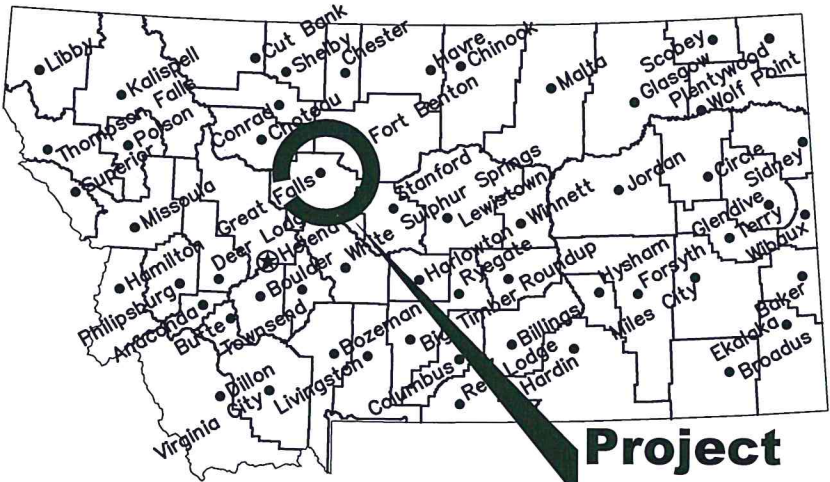

**Project
Location**

Location Map

No Scale

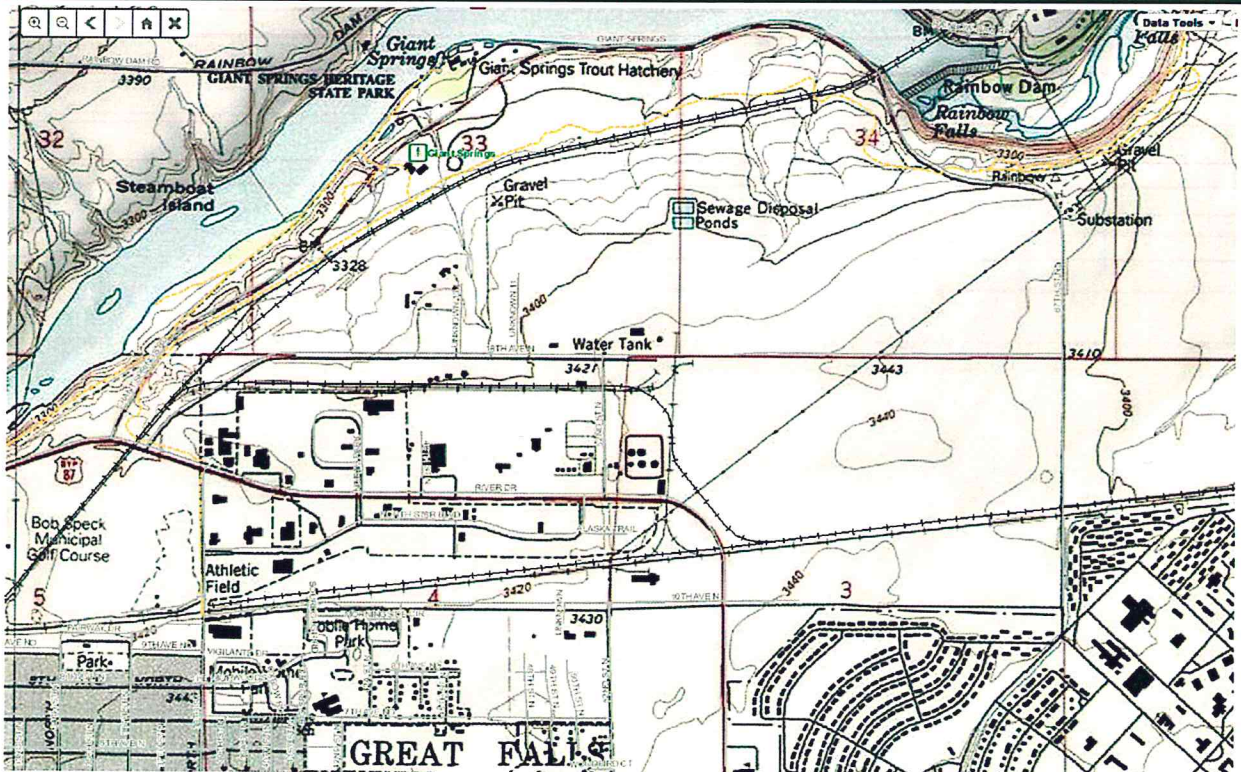

Vicinity Map

No Scale


MONTANA FISH, WILDLIFE AND PARKS
DESIGN AND CONSTRUCTION

MAILING ADDRESS: PO BOX 200701
HELENA, MT 59620-0701
TEL 406.841.4000
FAX 406.841.4004
fwp.mt.gov/Doing Business/Design&Construction

PHYSICAL ADDRESS: 1522 9th AVENUE
HELENA, MT 59601

DRAWING INDEX

Sheet Number	Sheet Title
1	COVER SHEET
2	SITE LOCUS PLANS

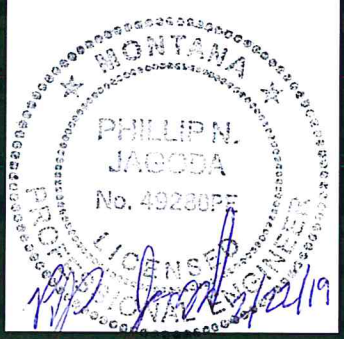

P. Jagoda 2/14/2019
DRAWN BY: DATE:
P. Jagoda 2/14/2019
CHECKED BY: DATE:

APPROVED BY: DATE:
APPROVED BY: DATE:


APPROVED BY: DATE:
APPROVED BY: DATE:



MONTANA FISH,
WILDLIFE & PARKS

Cover Sheet
Giant Springs Trout Hatchery Reroofing Project

SHEET: 1 of 2

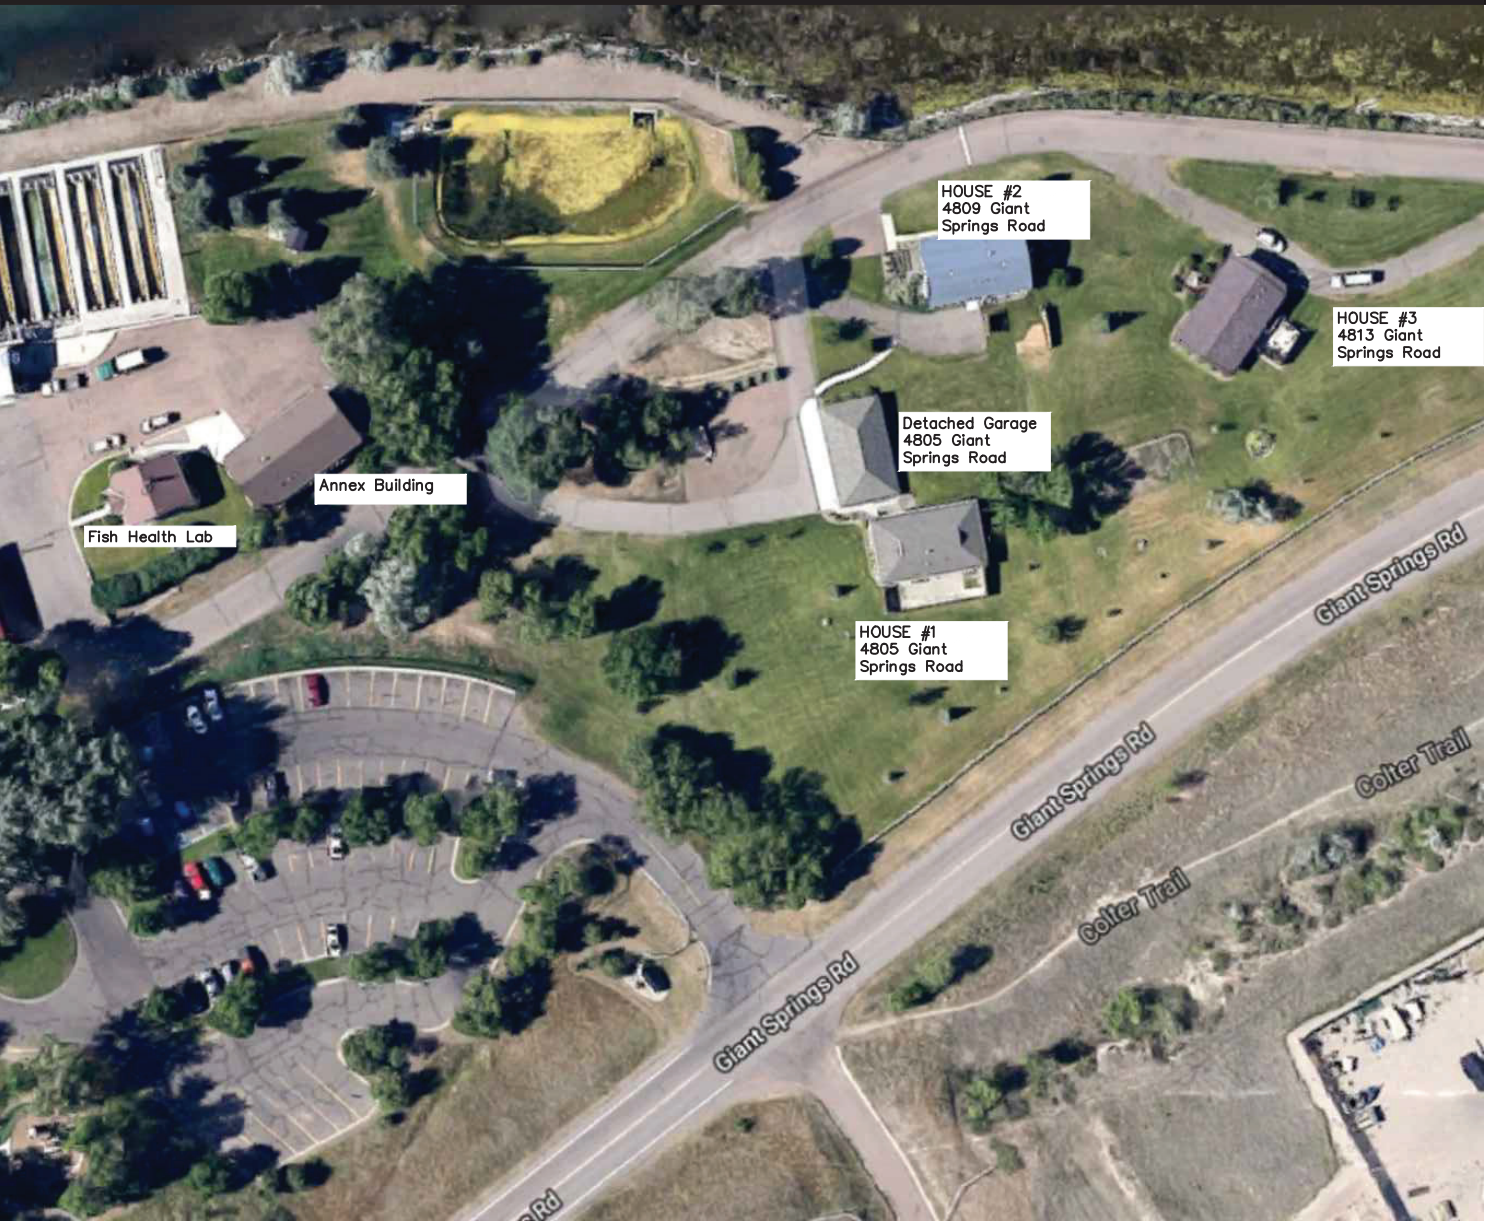

NOTES: CONTRACTOR TO REVIEW PROJECT SPECIFICATIONS FOR ALL APPLICABLE REQUIREMENTS, WHICH INCLUDE SOME OF THE FOLLOWING:

1. CONTRACTOR MUST PROTECT AC UNITS, SHRUBS, LANDSCAPING, AND ANY OTHER STRUCTURES WHICH COULD BE DAMAGED DURING REMOVAL OF EXISTING SHINGLES.
2. REMOVAL OF NAILS MUST BE CONTROLLED AND NOT ALLOWED TO ACCUMULATE ON DRIVING SURFACES OR PARKING AREAS (GRAVEL OR PAVED).
3. IT IS THE CONTRACTOR'S RESPONSIBILITY TO CONFIRM DIMENSIONS AND LAYOUT FOR QUANTIFYING MATERIALS. SLOPE FACTOR, WASTE, AND OVERLAP IS CONSIDERED INCIDENTAL TO THE PROJECT AND WILL NOT BE PAID AS EXTRA.
4. REMOVE EXCESS MATERIALS AND DEBRIS FROM FINISHED SURFACES AND ADJACENT ROOF AREAS.
5. REMOVE ALL DEBRIS FROM THE SITE AT THE END OF THE PROJECT. DISPOSE OF DEBRIS IN SAFE AND LEGAL MANNER.
6. COVER STRUCTURAL SUBSTRATE WITH WATERPROOF SHEET MATERIAL WHEN EXPOSED OVERNIGHT OR WHEN ADVERSE WEATHER IS IMMINENT.
7. PROTECT INSTALLED PRODUCTS UNTIL COMPLETION OF PROJECT.
8. ALL DIMENSIONS, LOCATION AND SIZE OF ROOF PENETRATIONS, AND ATTIC VENTS ARE TO BE VERIFIED BY AWARDED CONTRACTOR.
9. SUBMITTALS REQUIRED FOR MATERIALS USED IN PROJECT CONSIST OF: UNDERLAYMENT, SHINGLES OR METAL ROOFING, DRIP EDGE, VENTED RIDGE CAPS, AND OTHER ITEMS AS REQUESTED BY FWP PROJECT MANAGER OR DETAILED IN PROJECT SPECIFICATIONS.



The Following Items shall be considered incidental to the bid line items (see specifications):
R&R = "Remove & Replace" with new materials

- a. 4805 Giant Springs Road (Green House)
 - R&R flashing - pipe jacks (3)
 - R&R attic vents gable end (2)
 - Detach & reset digital satellites (2)
 - R&R rain cap
 - R&R furnace vent-rain cap & storm collar
 - R&R roof vent - turtle type
- b. 4809 Giant Springs Road (Gray House)
 - R&R flashing - pipe jacks (5)
 - R&R furnace vent-rain cap only
 - R&R roof vent - turtle type
 - Detach & reset digital satellite
- c. 4813 Giant Springs Road (Tan House w/attached garage)
 - R&R flashing - pipe jacks (3)
 - Detach & reset roof vent - turtle type (9)
- d. Detached Garage
 - R&R outside/inside corner 29 gauge
- e. Annex Building
 - R&R roof vent - turtle type (1)
 - R&R flashing - pipe jacks (2)
 - R&R furnace vent rain cap and storm collar (1)
- f. Fish Health Lab
 - R&R roof vent turtle type (2)
 - R&R valley metal (16 LF)
 - R&R flashing pipe jack (2)
 - R&R furnace vent rain cap and storm collar (1)

P. Jagoda	2/14/2019
DRAWN BY:	DATE:
P. Jagoda	2/14/2019
CHECKED BY:	DATE:

REVISED BY:	DATE:
APPROVED BY:	DATE:

APPROVED BY:	DATE:
APPROVED BY:	DATE:



**MONTANA FISH,
WILDLIFE & PARKS**

131

Site Locus Plans

Giant Springs Trout Hatchery Reroofing Project

SHEET: 2 of 2