


MONTANA FISH, WILDLIFE & PARKS

Cree Crossing Wildlife Management Area Equipment Storage Facility - Rebid

Near Saco, MT

FWP # 7155318

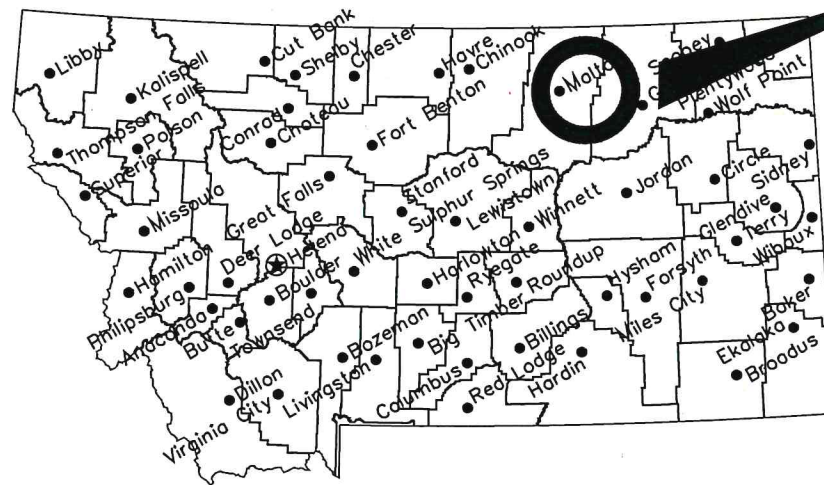


**Project
Location**

**Project
Location**

Location Map

No Scale

North

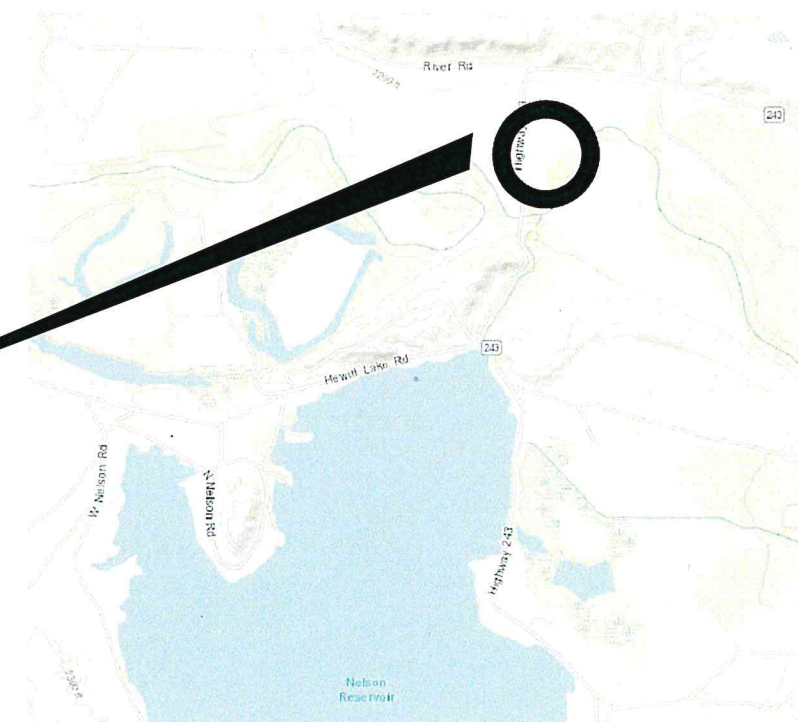

Vicinity Map


No Scale

MONTANA FISH, WILDLIFE AND PARKS
DESIGN AND CONSTRUCTION

MAILING ADDRESS: PHYSICAL ADDRESS:
PO BOX 200701 1522 9th AVENUE
HELENA, MT 59620-0701 HELENA, MT 59601
TEL 406.841.4000
FAX 406.841.4004
fwp.mt.gov/Doing Business/Design&Construction

DRAWING INDEX

Sheet 1	Cover
Sheet 2	Site Plan
Sheet 3	Floor Plan

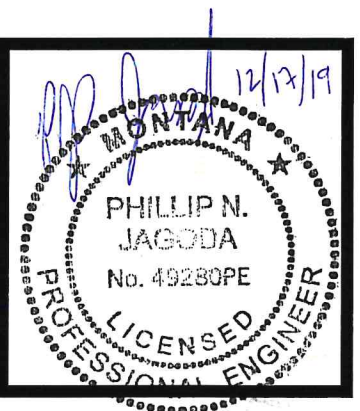

J. Renenger	08/07/2019
DRAWN BY:	DATE:
P. Jagoda	08/13/2019
CHECKED BY:	DATE:

APPROVED BY:	DATE:
APPROVED BY:	DATE:

APPROVED BY:	DATE:
APPROVED BY:	DATE:



**Montana Fish,
Wildlife & Parks**

148

Cover
Cree Crossing WMA Equipment Storage Facility - Rebid

SHEET: **1**
of
3



- NOTES:
1. IT SHALL BE THE CONTRACTOR'S RESPONSIBILITY TO OBTAIN THE NECESSARY STATE BUILDING PERMITS PRIOR TO CONSTRUCTION, AND VERIFY PERMITTING REQUIREMENTS PRIOR TO BIDDING.
 2. THE STRUCTURE SHALL BE A POLE BARN TYPE STRUCTURE ON CONCRETE PIERS FOUNDATION. NO WOOD MEMBERS SHALL BE IN CONTACT WITH OR BURIED IN THE GROUND
 3. ALL EXTERIOR SHEET METAL AND SIDING SHALL BE ATTACHED TO FRAME WITH SCREWS OF SUFFICIENT LENGTH TO RESIST WIND DAMAGE.
 4. SITE PREPARATION: REMOVE 6" TOP SOIL FROM FOOT PRINT AREA OF STRUCTURAL FILL, PLACE AND COMPACT STRUCTURAL FILL TO 5' BEYOND STRUCTURE DRIP LINE AT FINISHED FLOOR ELEVATION.
 5. THE TOTAL REQUIRED CRUSHED SURFACING IS 27 CY OF 1" MINUS CRUSHED GRAVEL AT 4" DEPTH.
 6. STRUCTURE SHALL HAVE METAL ROOFING AND SIDING WITH A MINIMUM 29 GAUGE THICKNESS.
 7. EXACT BUILDING LOCATION TO BE STAKED BY FWP.

- Utility Pole
- 36' x 36' Equipment Storage Facility
- ▨ Approved Staging Area
- █ Entrance Gate
- Overhead Lines



J. Renenger	08/07/2019
DRAWN BY:	DATE:
P. Jagoda	08/13/2019
CHECKED BY:	DATE:

REVISED BY:	DATE:
APPROVED BY:	DATE:

APPROVED BY:	DATE:
APPROVED BY:	DATE:




Montana Fish
Wildlife & Parks

149

Site Plan

Cree Crossing WMA Equipment Storage Facility - Rebid

SHEET: 2
of 3

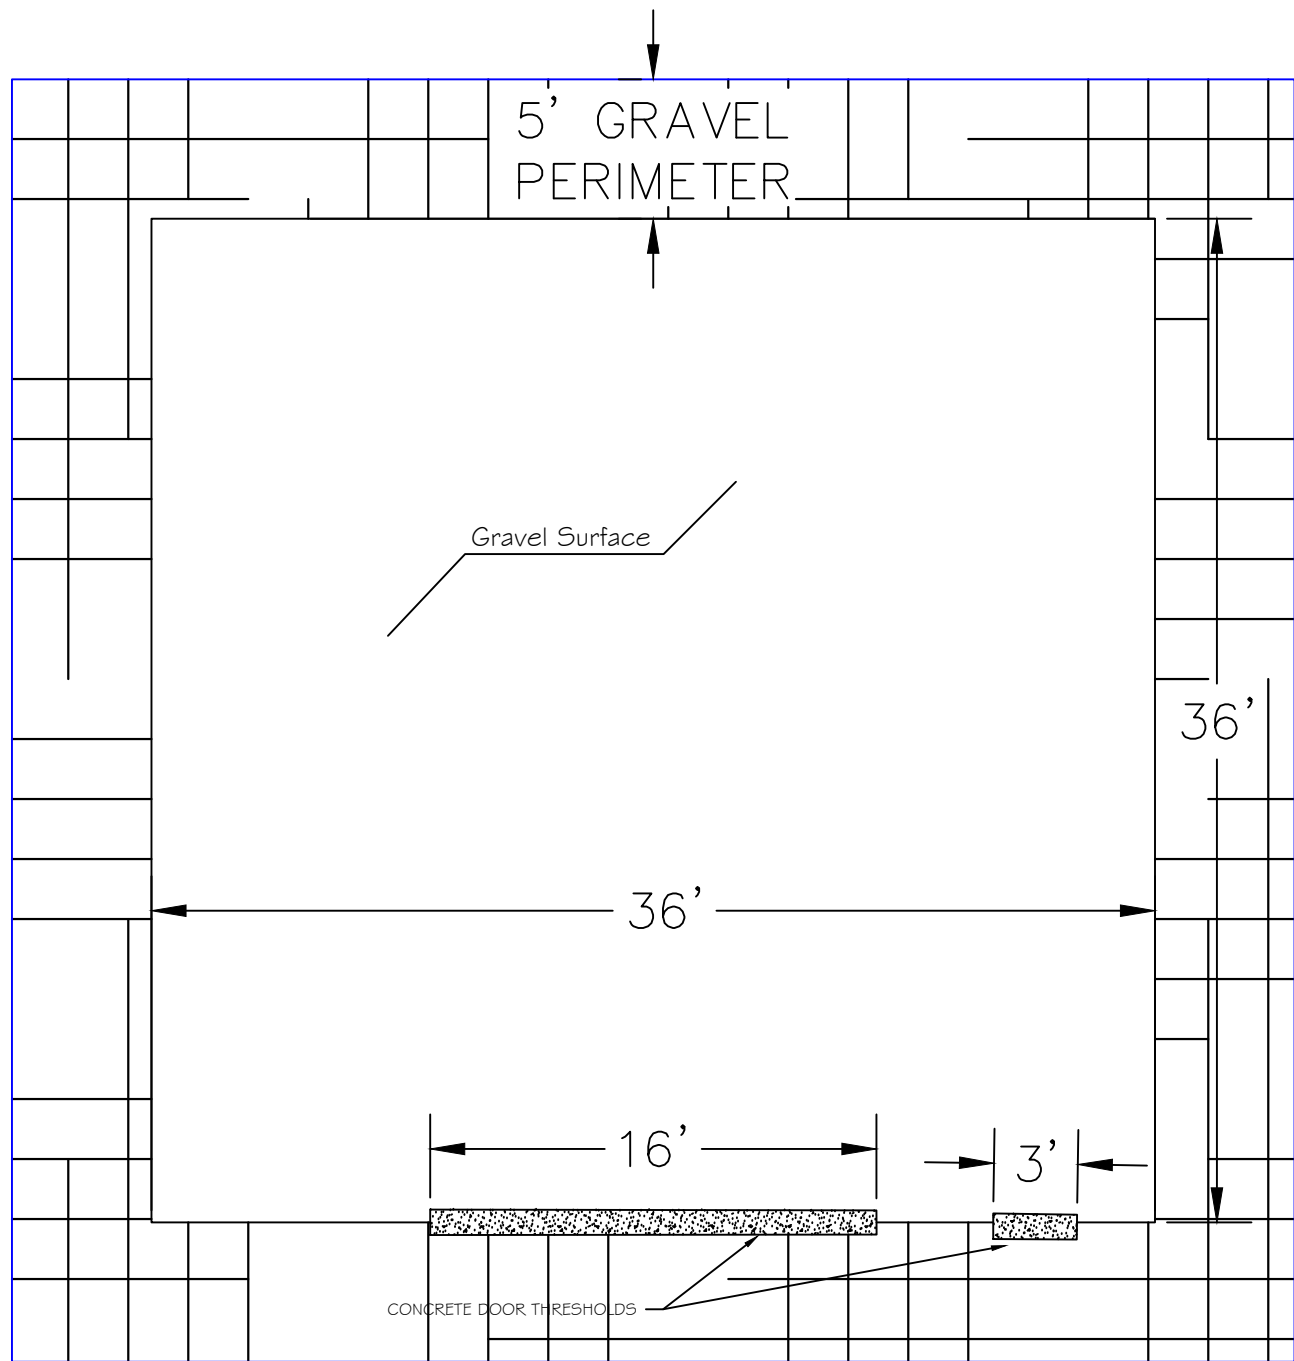

FLOOR PLAN

NOTES:

1. FWP ENGINEER WILL STAKE BUILDING LOCATION.
2. MATERIAL GENERATED FROM THE STRIPPING OF TOPSOIL SHALL BE USED TO REVEGETATE AREAS DESIGNATED WITHIN THE STAGING AREA. ALL AREAS DISTURBED DURING CONSTRUCTION SHALL BE RESEED. REFER TO SECTION 02936.
3. TRANSITIONS FROM NEW GRAVELED AREAS TO VEGETATED AREAS SHALL BE UNIFORM AND WELL DEFINED.
4. THE CONTRACTOR SHALL USE THE BEST MANAGEMENT PRACTICES TO PREVENT SILT, SOIL, AND DEBRIS FROM ENTERING WATER. THIS MAY INCLUDE STRAW, GRAVEL, OR FABRIC. OTHER APPROPRIATE METHODS MAY BE USED AT THE CONTRACTORS DISCRETION OR AS DIRECTED BY THE OWNER.
5. EQUIPMENT USED IN NEAR WATER SHALL NOT LEAK FLUIDS. IT SHALL BE POWER WASHED BEFORE USE ON THE SITE AND EXAMINED BY THE ENGINEER.
6. PROVIDED METHODS, MEANS AND FACILITIES TO PREVENT CONTAMINATION OF SOIL, WATER, AND ATMOSPHERE FROM DISCHARGE OF NOXIOUS, TOXIC SUBSTANCES, AND POLLUTANTS PRODUCED BY CONSTRUCTION OPERATIONS.
7. THE CONTRACTOR IS RESPONSIBLE FOR LOCATING AND PROTECTING UTILITIES WITHIN THE CONSTRUCTION AREA INCLUDING ACCESS ROUTES TO THE CONSTRUCTION AREA.
8. THE CONTRACTOR IS REQUIRED TO NOTIFY AND COORDINATE ALL WORK ACTIVITIES WITH THE FWP PROJECT ENGINEER.
9. SUBMITTALS ARE REQUIRED ON ALL PRODUCTS USED IN THE PROJECT, REFER TO SPECIFICATIONS FOR SUBMITTAL REQUIREMENTS.
10. PROVIDE ALL TEMPORARY SIGNING, PERSONNEL, AND TRAFFIC CONTROL DEVICES AS REQUIRED BY FEDERAL, STATE, AND LOCAL REGULATIONS.
11. THE CONTRACTOR IS RESPONSIBLE FOR OBTAINING THE STATE BUILDING AND ELECTRICAL PERMIT.

J. Renenger	08/07/2019
DRAWN BY:	DATE:
P. Jagoda	08/13/2019
CHECKED BY:	DATE:

REVISED BY:	DATE:
APPROVED BY:	DATE:

APPROVED BY:	DATE:
APPROVED BY:	DATE:



**Montana Fish
Wildlife & Parks**

150

Floor Plan
Cree Crossing WMA Equipment Storage Facility - Rebid

SHEET: **3**
of
3